



AUTHORIZED USA  
DISTRIBUTION BY:

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
[sales@cyntony.com](mailto:sales@cyntony.com)  
781-430-0675



 cyntony  
customer attuned

AD-64/D


The antenna AD-64/D is the ultra wideband manpack antenna intended for use with modern broadband software defined radios (SDR) and other radio devices (jammers, scanners, etc.). The antenna is a sleeve dipole center fed design thus enable to work without the presence of the ground plane. Radiation part of the antenna is fully enclosed in a fiberglass radome. The antenna is also equipped with the flexible goose neck allowing the antenna to be bent in almost every position. The antenna construction is rugged and intended for use in the harshest military environments.

Frequency range	500 - 3000 MHz
Impedance	50 ohms
VSWR	< 3:1 typical (see diagram)
Maximum power	50 W CW
Polarization	Linear Vertical
Gain	see diagram
Radiation Pattern	omnidirectional
Connector	N male
Height	425 mm
Weight	0.4 kg
Radome Diameter	28 mm
Temperature range	- 40....+70 °C




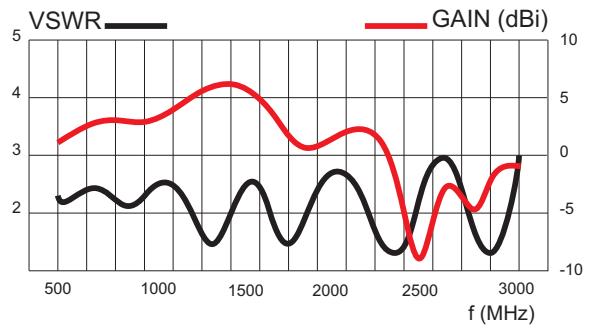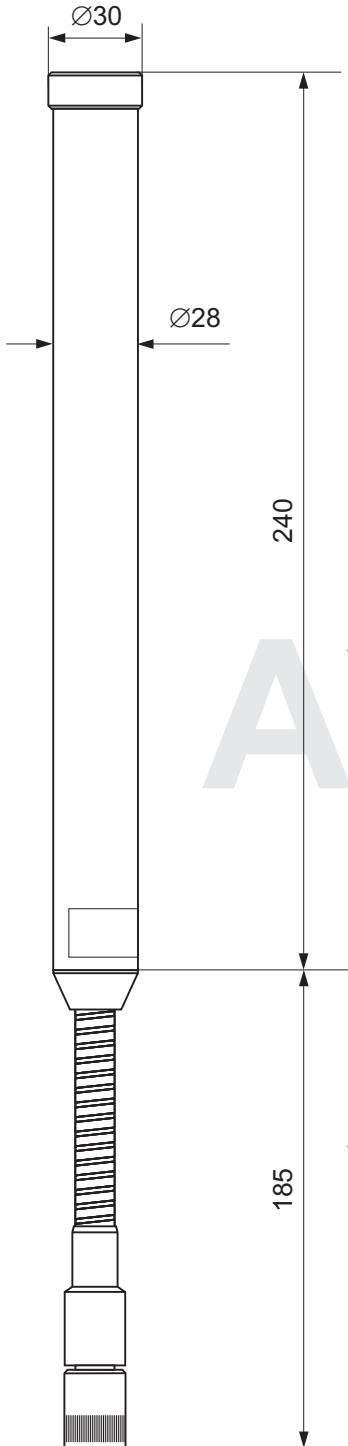


Rad. Pattern E-plane  
Frequency: 500 MHz

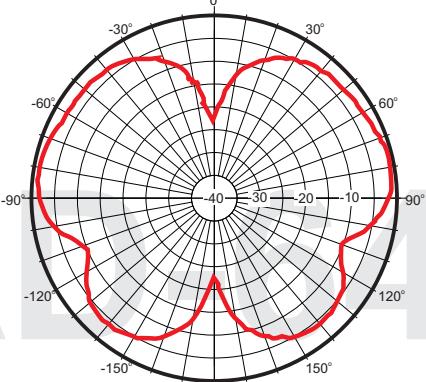


Rad. Pattern E-plane  
Frequency: 1000 MHz

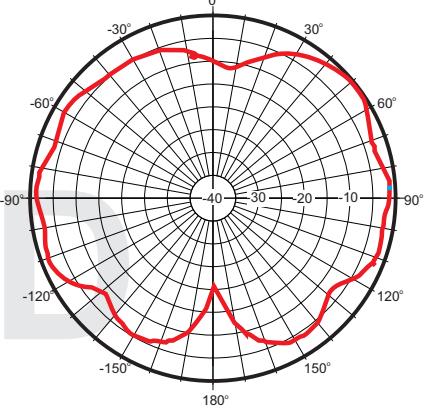


Rad. Pattern E-plane  
Frequency: 1500 MHz

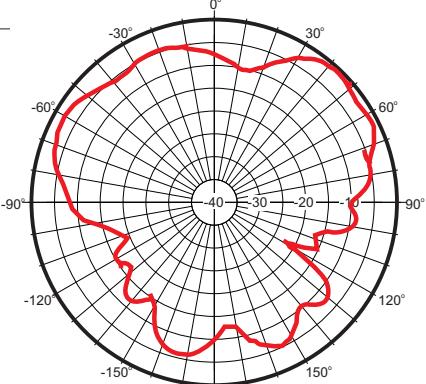


Rad. Pattern E-plane  
Frequency: 2000 MHz

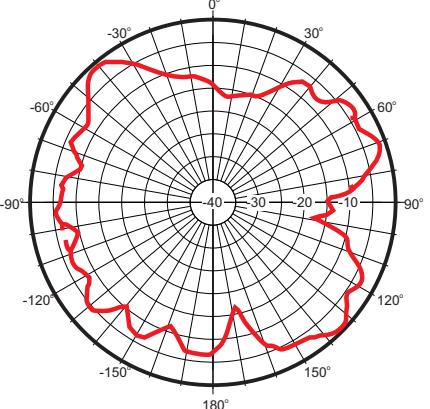

Rad. Pattern E-plane  
Frequency: 2500 MHz

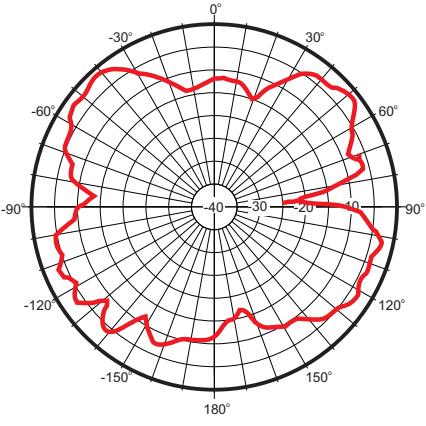

Rad. Pattern E-plane  
Frequency: 3000 MHz

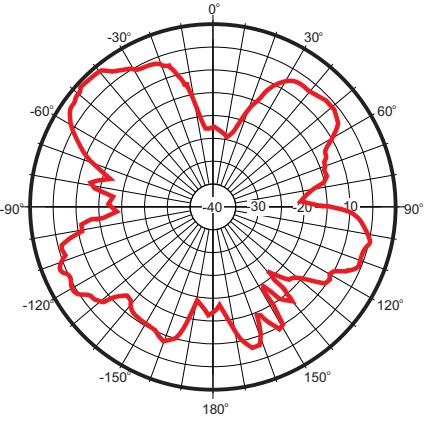

AUTHORIZED USA  
DISTRIBUTION BY:

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
[sales@cyntony.com](mailto:sales@cyntony.com)  
781-430-0675

**cyntony**  
customer attuned