

Vehicle-Mount Wideband High-Power Antenna

500 – 6000 MHz

Product Code: OMNI-A0266

VERSION: 1.4



SPECIFICATIONS:

Product versions:	
OMNI-A0266	N-type female
OMNI-A0266-03	4.3-10 female
Electrical:	
Frequency range	500 – 6000 MHz
Gain	0 dBi typical (in band)
Azimuth pattern	Omni, 3 dB ripple
Elevation pattern	Narrow beam
Polarisation	Vertical
Nominal impedance	50 Ω
VSWR	< 2.5:1 or better
Power handling:	
500 – 2000 MHz	150 W CW
2000 – 4000 MHz	100 W CW
4000 – 6000 MHz	80 W CW
Connector:	
OMNI-A0266	N-type female at base
OMNI-A0266-03	4.3-10 female at base
Groundplane requirements	Groundplane independent
Mechanical:	
Dimensions (l x d)	580 mm x 80 mm
Total mass	< 1.6 kg
Mounting	NATO base flange, 4 and 6 holes
Colour	Black, others on request
Environmental: designed to meet the following specifications	
Temperature range	Storage: -41 °C to +71 °C. Operation -31 °C to +55 °C
Weatherproofing	IP67 water resistant (when flange is mounted)
Exposed materials	Painted e-glass Anodized aluminium E-coated steel

PRODUCT FEATURES:

- Omni-directional wideband antenna
- Communications or signal interception
- Covers all handheld wireless bands

PRODUCT OVERVIEW:

This wideband antenna is for signal interception of wireless communications. It is mounted on a 4/6 hole base with either a N-type or a 4.3-10 female connector. The fibreglass tube contains the groundplane independent radiator.

The array covers the GSM 900, PCS, UMTS/3G/LTE and Wi-Fi (both bands).

Vehicle-Mount Wideband High-Power Antenna


500 – 6000 MHz

Product Code: OMNI-A0266


VERSION: 1.4

Simulated VSWR and gain graphs:

Typical VSWR:

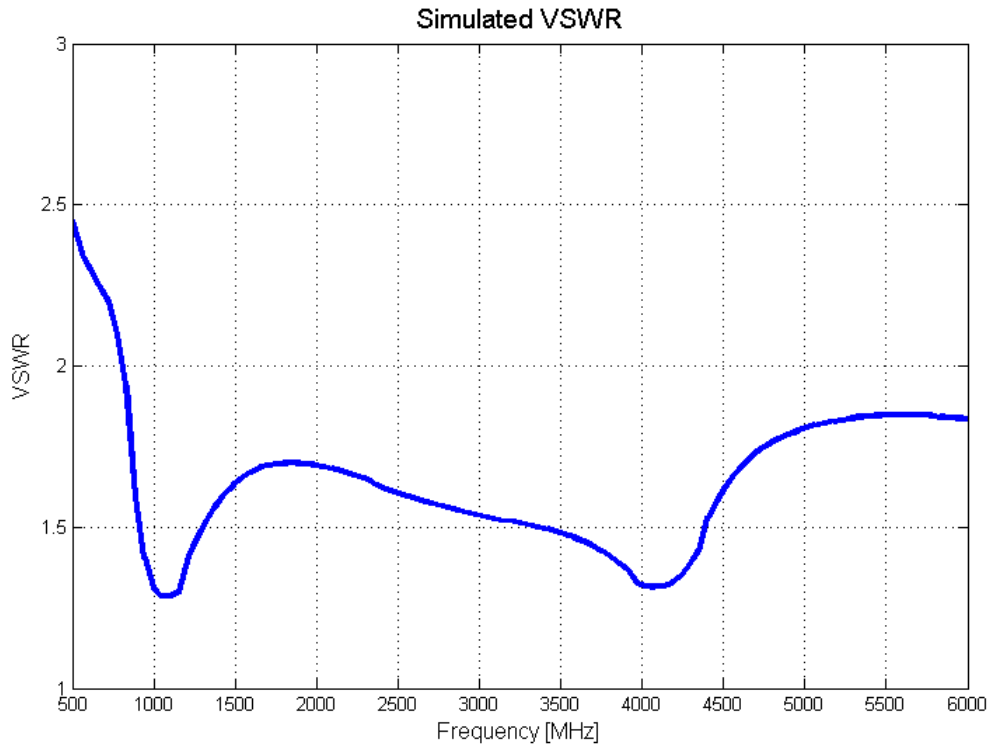

GAIN:

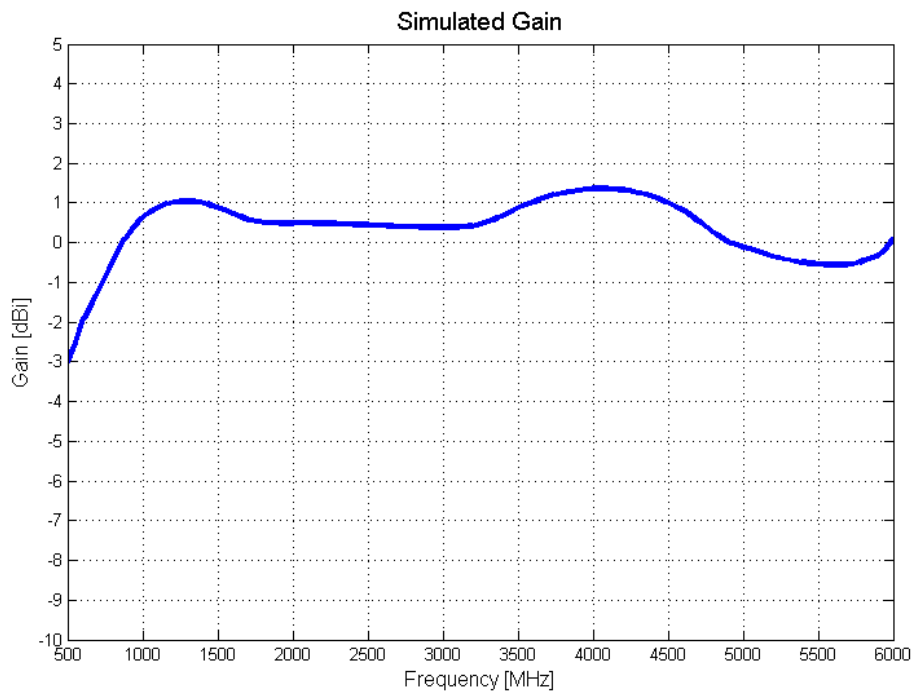

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675



**GAIN THE
ADVANTAGE**