

High-Power Wideband VHF Whip

30 – 100 MHz

Product Code: MONO-A0030

VERSION: 2.7

SPECIFICATIONS:



Product codes:		
MONO-A0030	30 to 100 MHz	
MONO-A0030-02	25 to 140 MHz	
Electrical:		
	MONO-A0030	-02
Frequency range	30 – 100 MHz	25 – 140 MHz
VSWR	< 3:1	
Feed power handling	300 W	
Gain (at the horizon, ground reflections excluded)	> -7 dBi	> -10 dBi
Elevation 3 dB beamwidth	60° (± 10°)	
Nominal input impedance	50 Ω	
Polarisation	Vertical	
Connector	N-type female	
Mechanical:		
Length x base diameter (mm)	2250 mm x 135 mm	1600 mm x 135 mm
Weight	5 kg	
Mounting base	NATO flange 4 and 6 holes	
Environmental: designed to meet the following specifications		
Wind loading	160 km/h	
Temperature (operational)	- 30 °C to + 65 °C (no icing)	
Shock	20 G at 10 msec	
Thermal shock	- 20 °C to +70 °C: 10 cycles	
Water ingress rating	IP 65 (NEMA 4X)	

FEATURES:

- Wide frequency coverage (30 to 100 MHz)
- High-power, 300 W at 100% duty cycle
- Excellent VSWR
- Omni-directional azimuth pattern
- Rugged and hard-wearing
- Suited to low-profile applications

APPLICATIONS:

- Improvised explosive device (IED) suppression
- Communications interception

PRODUCT DESCRIPTION:

The MONO-A0030 is a high-power wideband whip antenna designed for high-power applications in the 30 to 100 MHz frequency band.

The antenna has an excellent radiation pattern, no pattern break-up, and a consistently low VSWR across the entire frequency band. It can handle full rated power continuously at all frequencies, making it ideal for all 100% duty-cycle applications.

The antenna's size and appearance is similar to many communications antennas, allowing it to be used on all types of vehicles without disclosing their purpose. The insulated radiator is robust, hard-wearing and impervious to fuel, oil and hydraulic fluid.

High-Power Wideband VHF Whip


30 – 100 MHz

Product Code: MONO-A0030


VERSION: 2.7

VSWR AND GAIN GRAPHS:

Typical VSWR:

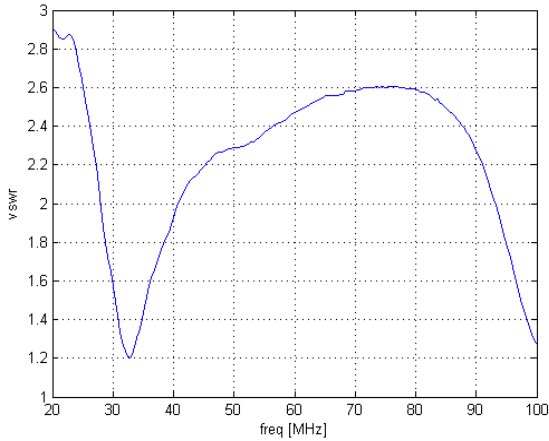


Gain (excluding ground reflections):

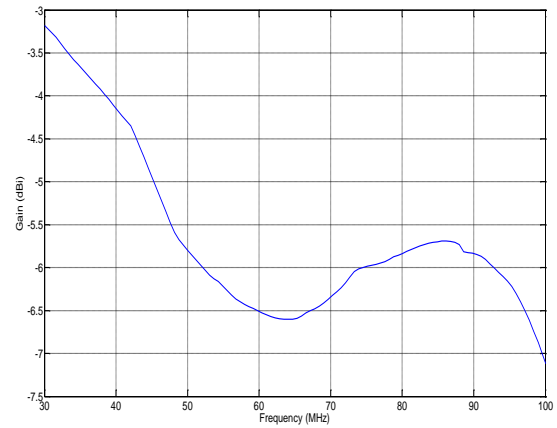


Elevation patterns:

30 MHz

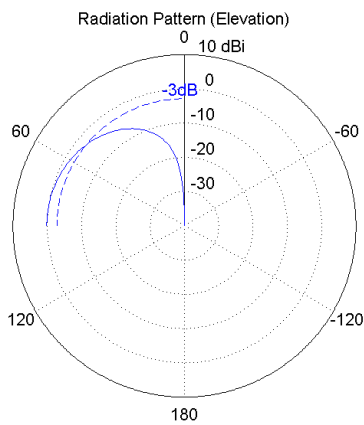

100 MHz

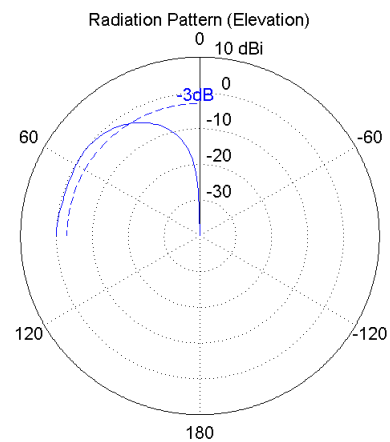

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675



**GAIN THE
ADVANTAGE**