


# High Gain L-band Omni

1.6 – 1.9 GHz

Product Code: OMNI-A0135

VERSION: 1.5

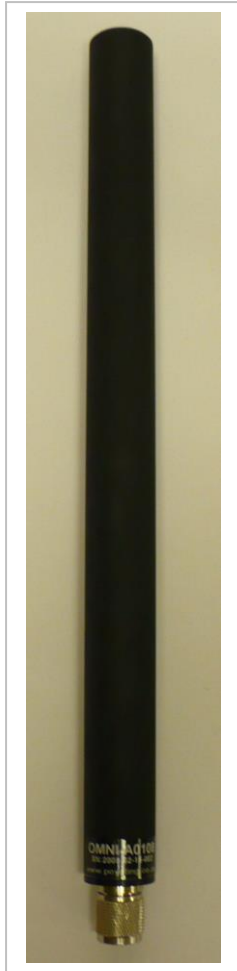

## SPECIFICATIONS:

<b>Product code:</b>	
OMNI-A0135	TNC (M) connector
OMNI-A0135-01	N-type (M) connector
<b>Electrical:</b>	
Frequency range	1600 – 1900 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω
Feed power handling	20 W
Gain (typical)	4 – 5 dBi
Polarisation	Vertical
Azimuth ripple	±1 dB
<b>Mechanical:</b>	
Height	340 mm
Diameter	22 mm
Total mass	100 g
Colour	Black
Mounting method	Direct to connector
Groundplane requirement	Groundplane independent
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	100 km/h
Temperature (operational)	-31 °C to +51 °C
Temperature (storage)	-31 °C to +71 °C
Vibration	MIL-STD-167-1 type 1
Shock	20 G / 10 mS X,Y,Z axes
Water and dust resistance	MIL-STD-820F (506.4)

## PRODUCT FEATURES:

- Collinear design gives better gain than dipole and monopole antennas
- Low VSWR across the band
- Rugged and lightweight

## APPLICATIONS:

- Communications

## PRODUCT DESCRIPTION:

The OMNI-A0135 is a wideband, high-gain omni-directional antenna for use in the 1.6 to 1.9 GHz upper L-band frequency range at power levels up to 20 W. The antenna utilises a collinear dipole array radiator with integrated balun, making it groundplane independent and suitable for use on any mounting platform, such as manpacks and mobile electronic devices. The antenna is designed and intended for use in extreme operational conditions.

# High Gain L-band Omni


1.6 – 1.9 GHz

Product Code: OMNI-A0135


VERSION: 1.5

## VSWR AND GAIN GRAPHS:

### VSWR:

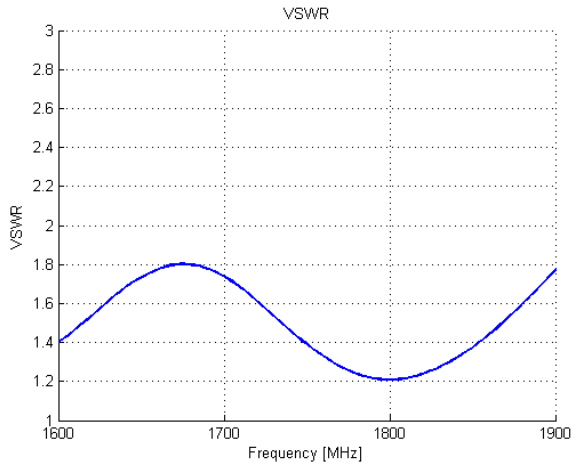

### GAIN:

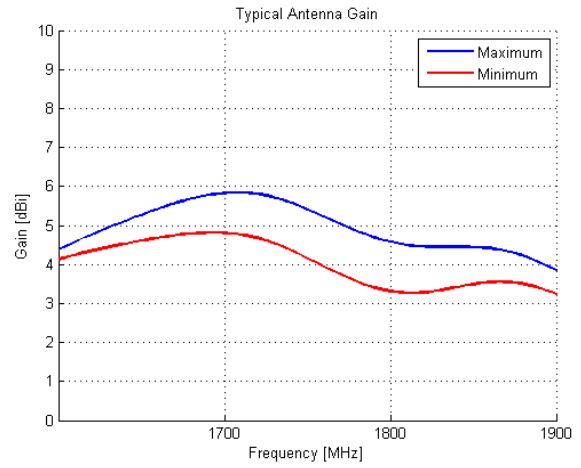

**AUTHORIZED USA DISTRIBUTION BY:**

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
sales@cyntony.com  
781-430-0675



**GAIN THE ADVANTAGE**