

VERSION: 1.9



PRODUCT FEATURES:

- High efficiency VHF antenna
- Proven flexible base spring protects the antenna

APPLICATION AREAS:

- Manpack high-power systems
- Wideband monitoring
- Man-carried force protection
- Carry-forward high-power solutions

Manpack VHF High-Power Antenna

20 – 500 MHz

Product Code: OMNI-A0180

SPECIFICATIONS:


Product code:	
OMNI-A0180	N-type (M) connector
OMNI-A0180-01	7/16 (M) connector
Electrical:	
Frequency range	20 – 500 MHz
Gain	See graph
VSWR	< 2.5:1 (typically)
Nominal impedance	50 Ω
Azimuth pattern	Omni-directional
Elevation pattern	Monopole pattern
Power handling:	
20 – 50 MHz	30 W CW
50 – 500 MHz	50 W CW
Groundplane requirements	Groundplane dependent;
	Minimum 200 mm x 200 mm x
	400 mm, manpack
	recommended
Mechanical:	········
Dimensions (I x d)	< 840 mm x 35 mm
Total mass:	
OMNI-A0180	0.55 kg
OMNI-A0180-01	0.6 kg
Mounting	On connector at base
Colour	Black, others on request
Environmental: designed to r	neet the following specifications
Temperature range	Storage: -30 °C to +70 °C
	Operation -30 °C to +55 °C
Weatherproofing	IP 66 rain resistant (when
	mounted on a connector)
Shock and vibration	MIL-STD-810E 516.4: vibration
	category 8, shock 40 g
Corrosion	Appropriate anti-corrosion
	measures are taken in the
	design of antenna for harsh
	environmental conditions
Exposed materials	Aluminium, stainless steel,
	fibreglass

PRODUCT OVERVIEW:

The OMNI-A0180 wideband manpack antenna covers the full VHF band with some extension to 20 MHz and 520 MHz. It is mounted on either an N-type or 7/16 connector base, a spring for shock absorption and flexibility, and a glass-fibre tube containing the radiator.








Manpack VHF High-Power Antenna

20 - 500 MHz


Product Code: OMNI-A0180 VERSION: 1.9

VSWR AND GAIN GRAPHS:

Typical VSWR:

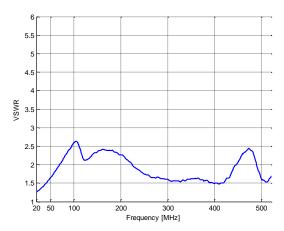


GAIN:

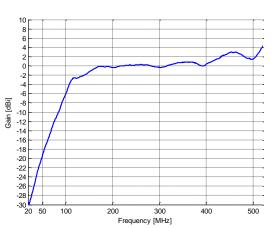


Radiation patterns:

ELEVATION:

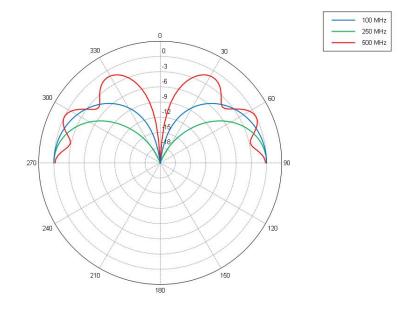





Updated 2015-05-25