

VERSION: 1.3



PRODUCT DESCRIPTION:

The OMNI-A0221 is a high-power, wideband antenna designed for vehicle-mounted applications. The antenna operates from 20 to 3000 MHz separated into 2 bands; Band A covers 20 to 180 MHz and Band B covers 500 to 3000 MHz.

Band A can handle full rated power continuously at all frequencies, making it ideal for all 100% duty-cycle applications. The insulated radiator is robust, hard-wearing and impervious to fuel, oil and hydraulic fluid.

The antenna is designed for direct mounting to ground platform with aid of grounding strap provided.

The OMNI-A0221-01 is a low profile version of the OMNI-A0221 and is ideal for armed vehicles; however, it suffers from gain degradation at low frequency.

Updated 2015-05-25



High-Power Wideband Antenna

20 – 3000 MHz

Product Code: OMNI-A0221

SPECIFICATIONS:

| Product code: | | |
|---|---------------|------------------------------|
| | | Standard whip length |
| OMNI-A0221-01 | | Low profile version |
| OWINFAUZZ I-U I | | |
| Electrical: | | |
| Frequency range: | | |
| Band A | | 20 – 180 MHz |
| Band B | | 500 – 3000 MHz |
| VSWR: | | |
| Band A | | < 3:1, typical |
| Band B | | < 2.5:1, typical |
| Gain: | OMNI-A0221 | See graphs |
| | OMNI-A0221-01 | Deteriorates by approx. 3 dB |
| | | at low frequency compared to |
| | | the standard OMNI-A0221 |
| Feed power handling: | | |
| Band A | | 120 W CW |
| Band B | | 100 W |
| Polarisation | | Vertical |
| Nominal input impedance | | 50 Ω |
| Connectors | | 2 x N-type female |
| Ground plane requirements: | | |
| Band A | | Ground plane dependent |
| | | (1000 mm x 1000 mm |
| | | recommended) |
| Band B | | Ground plane independent |
| | | |
| Mechanical: | | |
| Length: | OMNI-A0221 | 2100 mm |
| • | OMNI-A0221-01 | 1600 mm |
| Base diameter | | Ø140 mm |
| Maximum diameter | | Ø200 mm |
| Total mass | | < 9 kg |
| Mounting method | | NATO flange 4 and 6 holes |
| Environmental designed to meet the following | | |
| Environmental: designed to meet the following specifications | | |
| Wind survival | | 160 km/h |
| Temperature range | | -30 °C to +70 °C |
| | | MIL-STD-810E 516.4: |
| Shock and vibration | | vibration category 8, shock |
| | | 40 g |
| Water ingress rating | | IP65 |
| | | |

PRODUCT FEATURES:

- 20 to 3000 MHz frequency range
- Rugged and hard wearing
- Suited for vehicle-mount applications


APPLICATION:

- Improvised explosive device (IED) suppression
- Communications interception

RELATED PRODUCTS:

OMNI-A0201







High-Power Wideband Antenna


20 – 3000 MHz

Product Code: OMNI-A0221

VERSION: 1.3

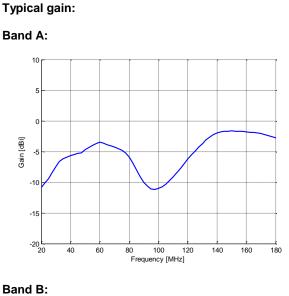

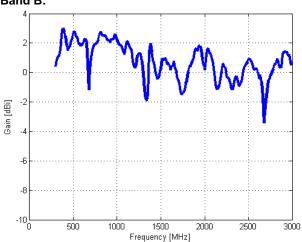

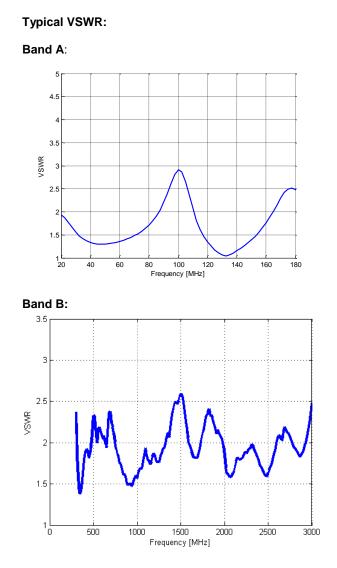



Updated 2015-05-25

PAGE 2 of 2

AUTHORIZED USA DISTRIBUTION BY: Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675



