




MASTS STV

**winch
driven**

TELESCOPIC

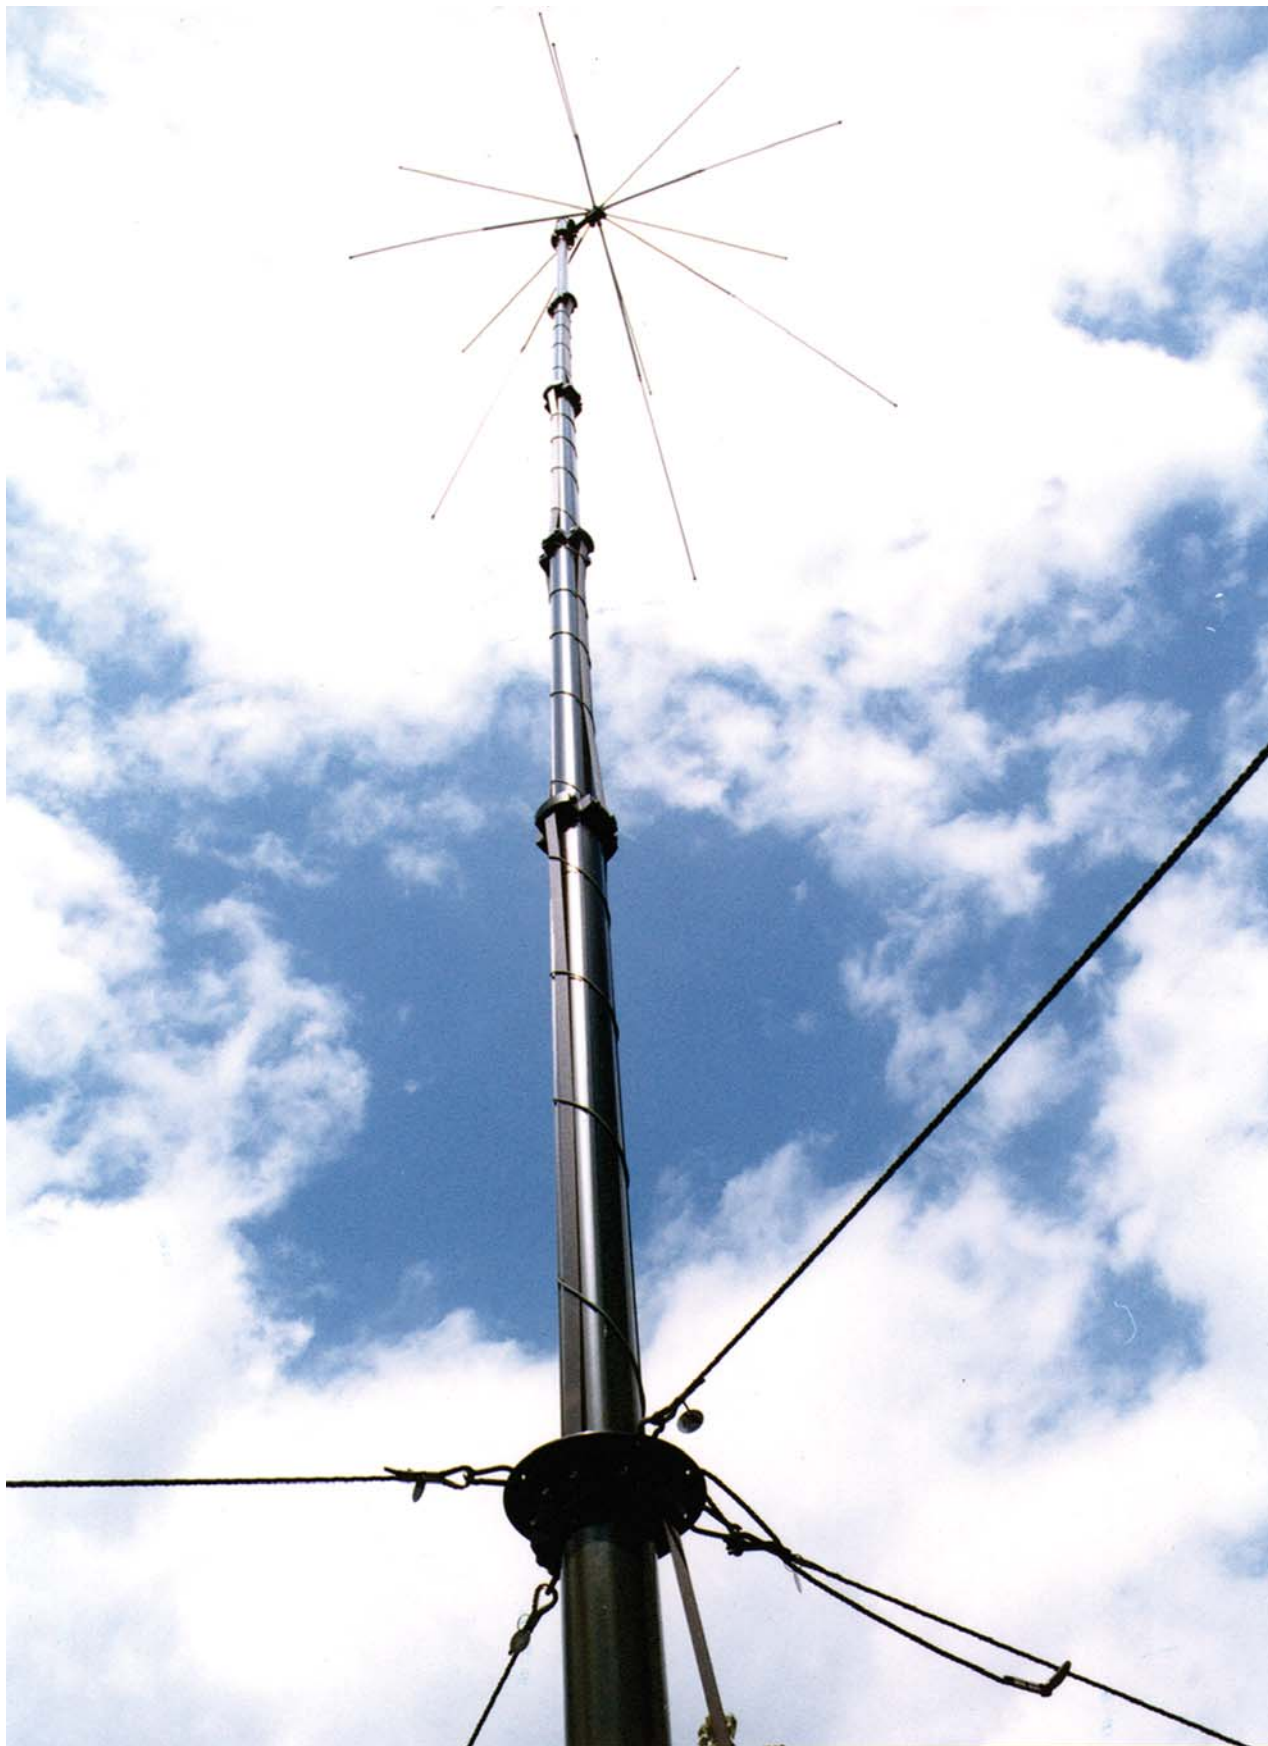

**TRIVAl
antenne**

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned

TELESCOPIC WINCH OPERATED MASTS SERIES STV DESIGNED FOR HARSHTEST MILITARY ENVIRONMENT OPERATIONS

Telescopic winch operated masts series **STV** are designed on a basis of many years of experience in development and production of antennas and antenna masts and on a basis of knowing and considering the needs and demands of the end users in the era of modern wireless telecommunications.

The family of telescopic masts STV consists carefully selected modern materials and technologies and considerate design, functionality and simplicity of use. With all that features the family of the masts STV are suitable for use on the field as well as on the vehicles also in hardest environmental conditions.



The mast is basically composed of telescopic sections made of **composite material ("fiberglass")** by use the process of "pultrusion". By use of that technology all the fibres are placed longitudinally along the section enable excellent stability with high degree of elasticity. Certain fiberglass layer is also wounded radially during the pultrusion process enables high degree of radial hardness. The masts STV meet environmental requirements in accordance with **MIL-STD-810**.

The sections have four special **longitudinal guideways** placed equally outside and made during the process of pultrusion enable excellent guidance when raising and lowering of the masts as well as additionally longitudinal stability. The guideways ensure that the mast is **axially joined together** prevent the various sections from turning which allows us to easily turn the whole mast in the case of using directional antennas. On the end of the sections are special slide-joints made of durable polyacetal with low weight and excellent mechanical characteristics.

Erection of the mast is enabled with **removable hand or motor operated winch** with cogwheel transmission and with system of strong polyester-aramide reinforced belts guided between the sections. During the erection we put the belt into the winch wheel and wind it with crank arm or electric winch STV-EW, which lifts the sections up. For lowering the mast we simply turn the crank arm in the opposite direction without any need of hand switching which is done by built-in **automatic switch mechanism**. The winch has built-in **automatic safety brake** to protect the operator in the case of heavier loads.



The telescopic mast STV has all accessories need for field erection: anchors, guying ropes (made of DYNEEMA material), hammer, etc., together with special cross-bar with eye-anchor intended to fix the mast in specific direction, the base plate with safety chain attachments and extension aluminum tube with grounding screw for antenna attachment. All the accessories are stored in separate linen bags. The mast alone has also linen cap for top sections protection.



The telescopic masts series **STV are applicable also for mobile use** mounted on vehicles. For this purpose a special mounting kit is available, composed of base plate element and side bracket.

All STV telescopic masts are CE certified



STV TELESCOPIC MASTS - MOBILE MOUNTING

STV telescopic winch driven masts could be mounted on various kinds of vehicles. To ensure that the mast will be mounted properly and safely, the following facts must be taken into account:


- Two basic mobile mounting adapters are available: the STV-L and STV-U (detailed technical drawings are available on request). Both adapters have all necessary holes and fittings made so that the masts series STV could be inserted on that adapters with the mast foot and the first guying ring plate.


- The other side of the adapters has another holes drilled and prepared to fit on special mounting bracket (not supplied!) which will fit specific car body. The user must provide those adapters according to the specific vehicle body construction.



STV TELESCOPIC MASTS - SEMI MOBILE MOUNTING

When the mast is too big to be completely attached to the vehicle or shelter then so called "semi mobile" mounting is recommended. In this case the mast foot lays on the ground while the upper attachment can be provided with various combinations of clamps and consoles available.

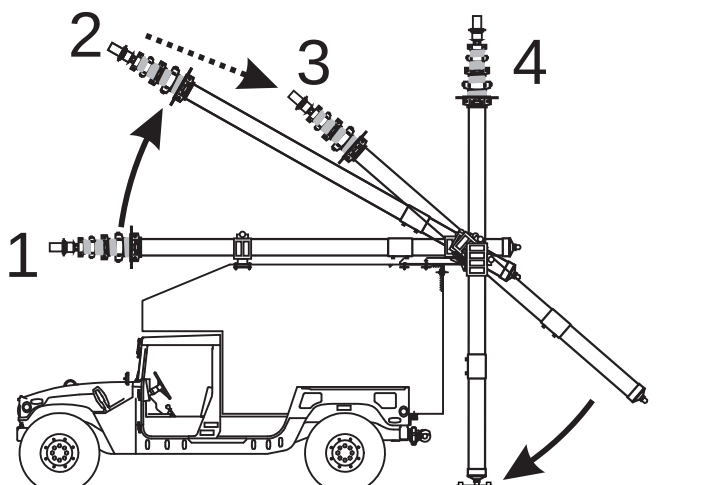


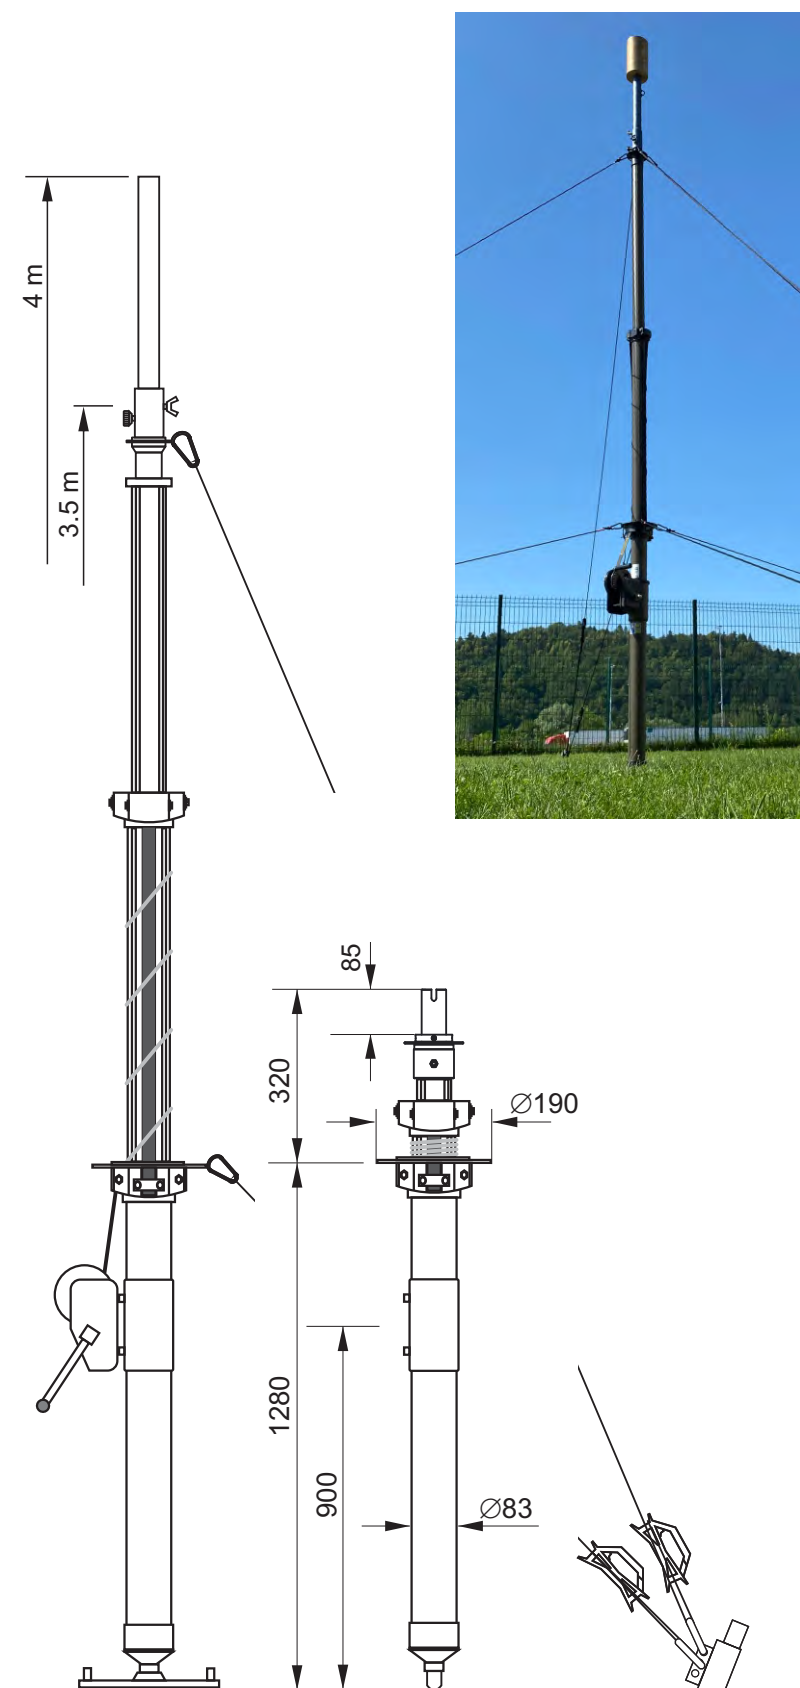

TECHNICAL SPECIFICATIONS

System height (m)	4
Mast height (m)	3.5
Retracted length (m)	1.6
Bottom section diam. (mm)	83
Top section diam. (mm)	60.5
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.25
Max. horizontal top load (N)	180
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	4
No. of guys x levels	4 x 2
No. of sections	3
Mast weight (kg)	10.6
Accessories weight (kg)	25





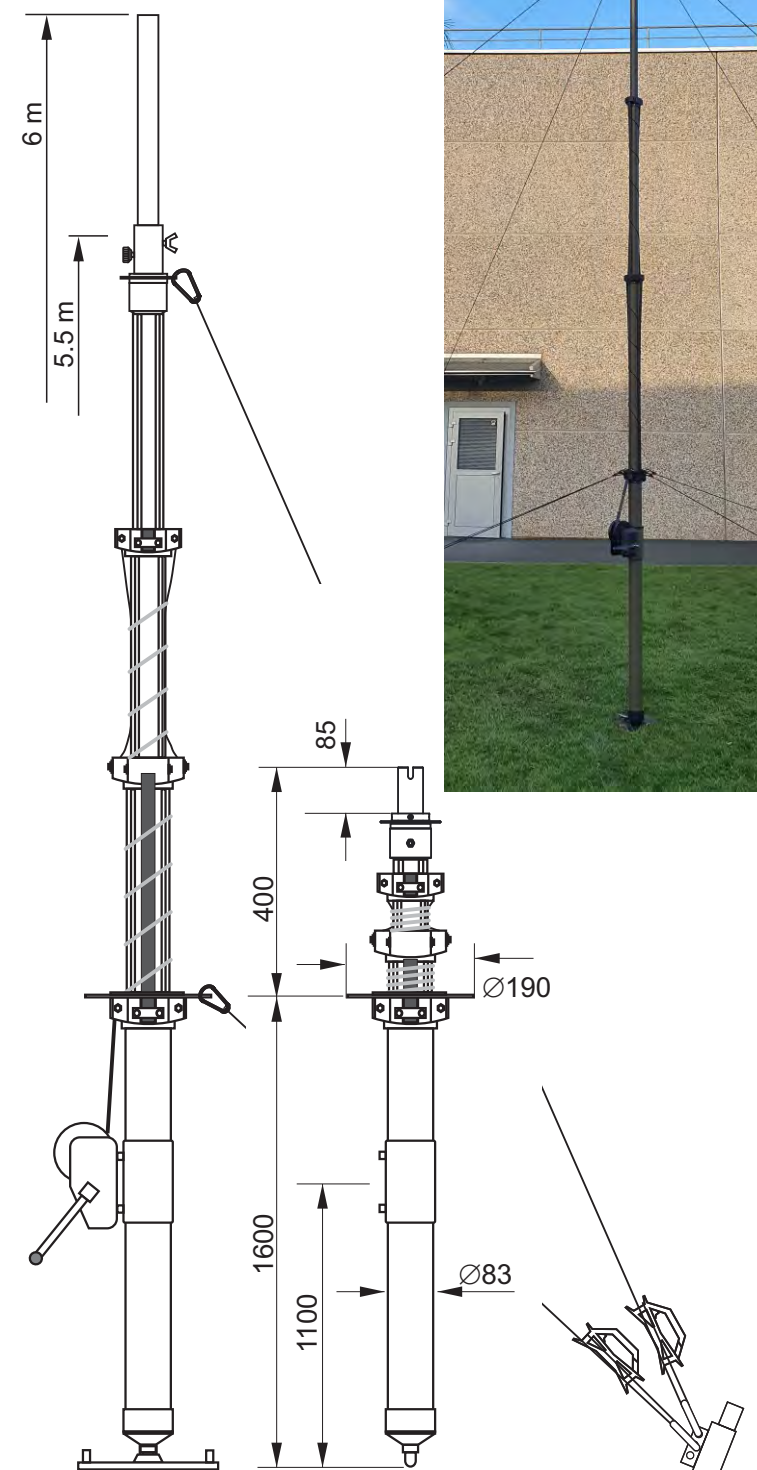

TECHNICAL SPECIFICATIONS

System height (m)	6
Mast height (m)	5.5
Retracted length (m)	2.0
Bottom section diam. (mm)	83
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.25
Max. horizontal top load (N)	180
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	5
No. of guys x levels	4 x 2
No. of sections	4
Mast weight (kg)	13.6
Accessories weight (kg)	24.4




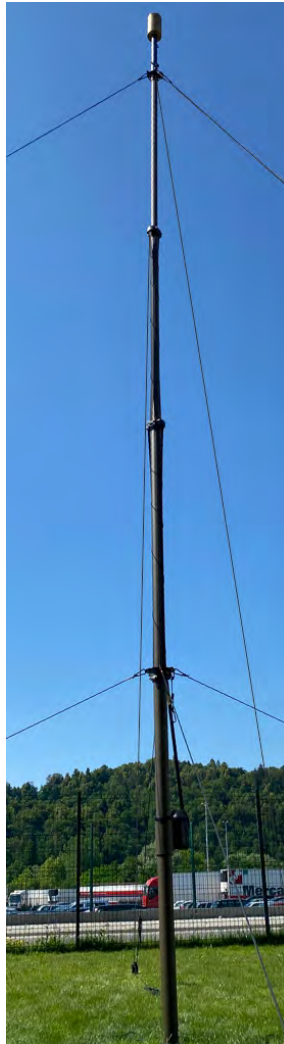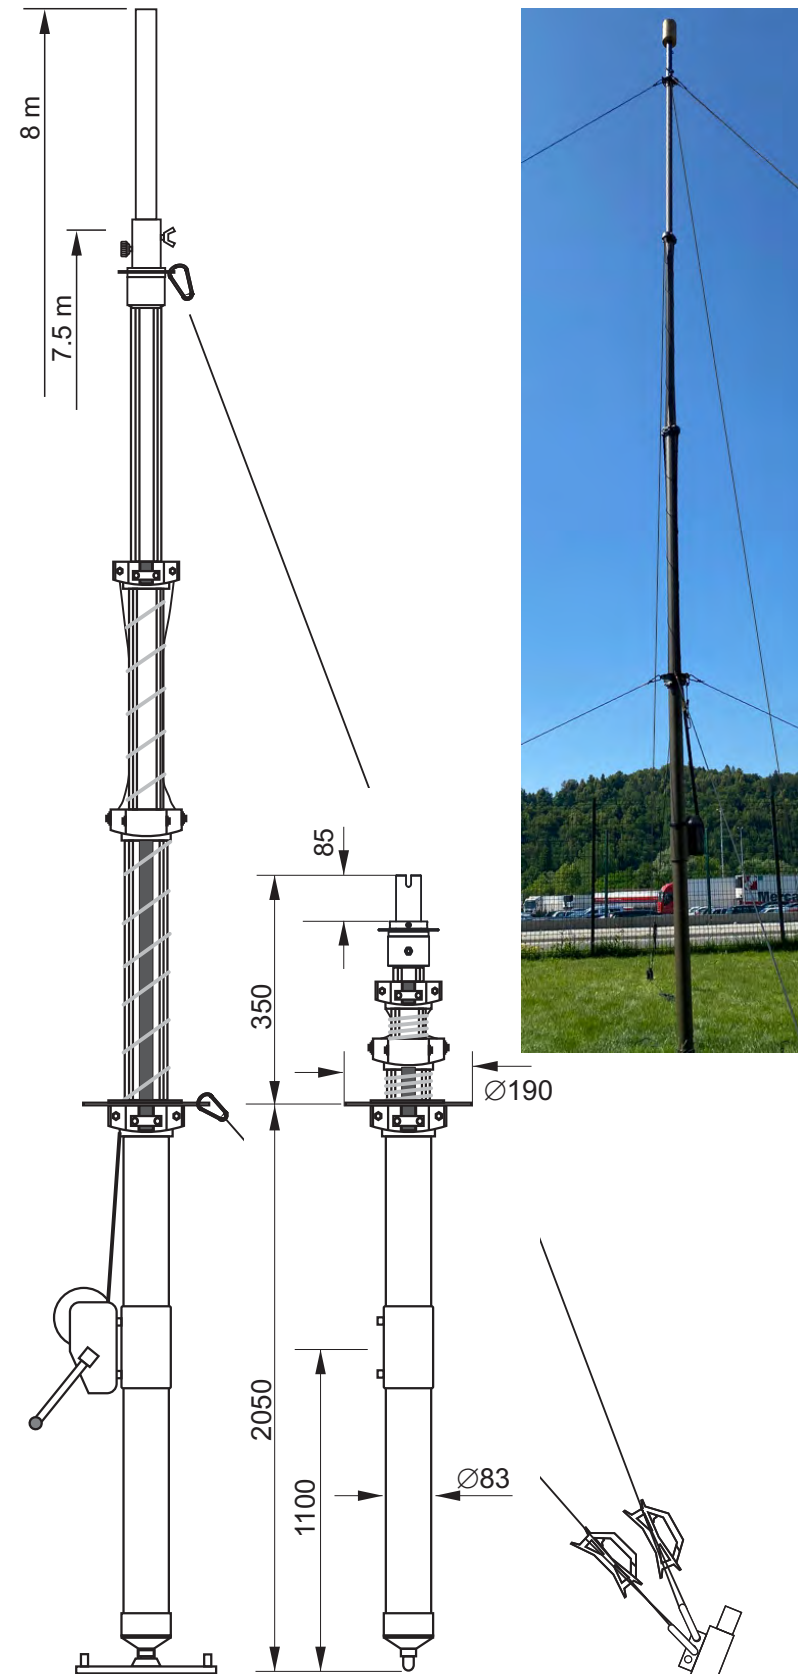


TECHNICAL SPECIFICATIONS

System height (m)	8
Mast height (m)	7.5
Retracted length (m)	2.4
Bottom section diam. (mm)	83
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	20
Max. wind area CxA (m ²)	0.25
Max. horizontal top load (N)	180
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	4
Mast weight (kg)	15.8
Accessories weight (kg)	25




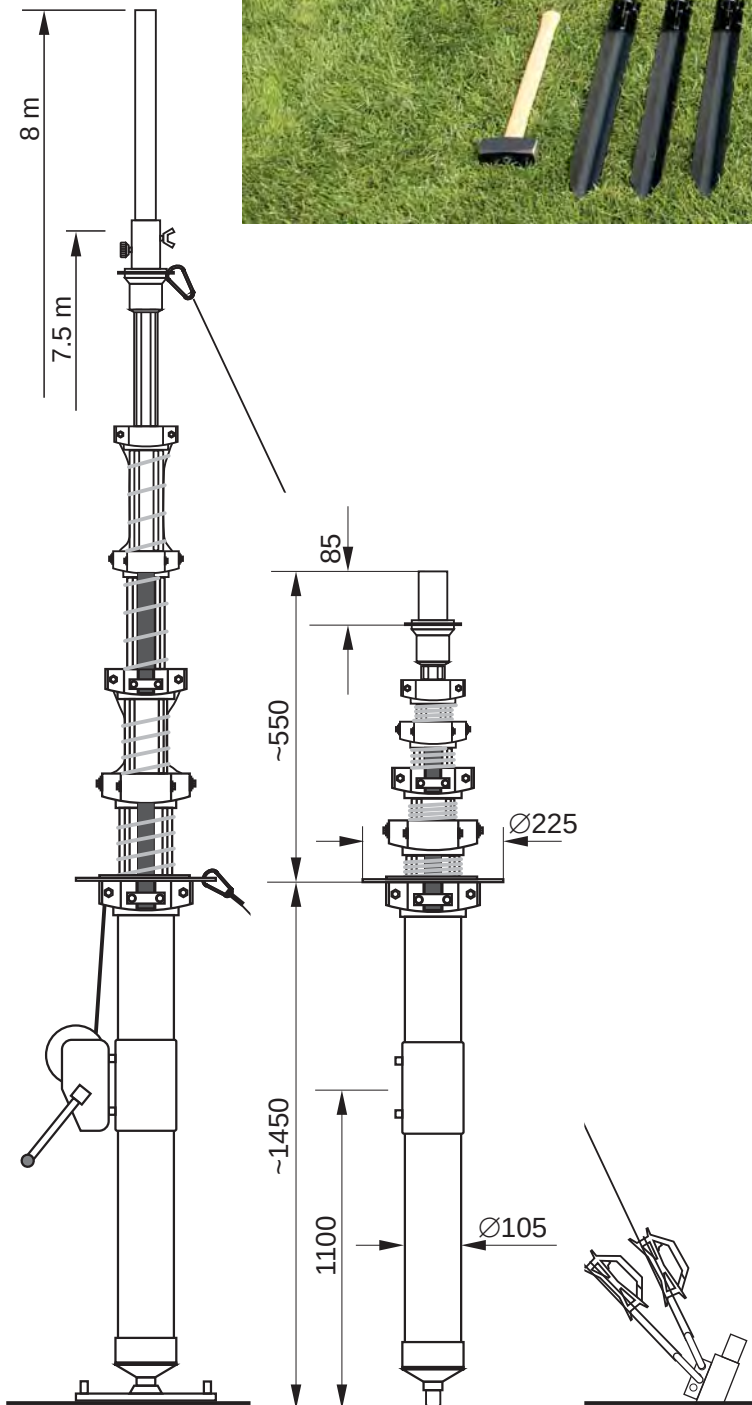

TECHNICAL SPECIFICATIONS	
System height (m)	8
Mast height (m)	7.5
Retracted length (m)	2.0
Bottom section diam. (mm)	105
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.50
Max. horizontal top load (N)	360
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	8
Mast weight (kg)	20.5
Accessories weight (kg)	27.5

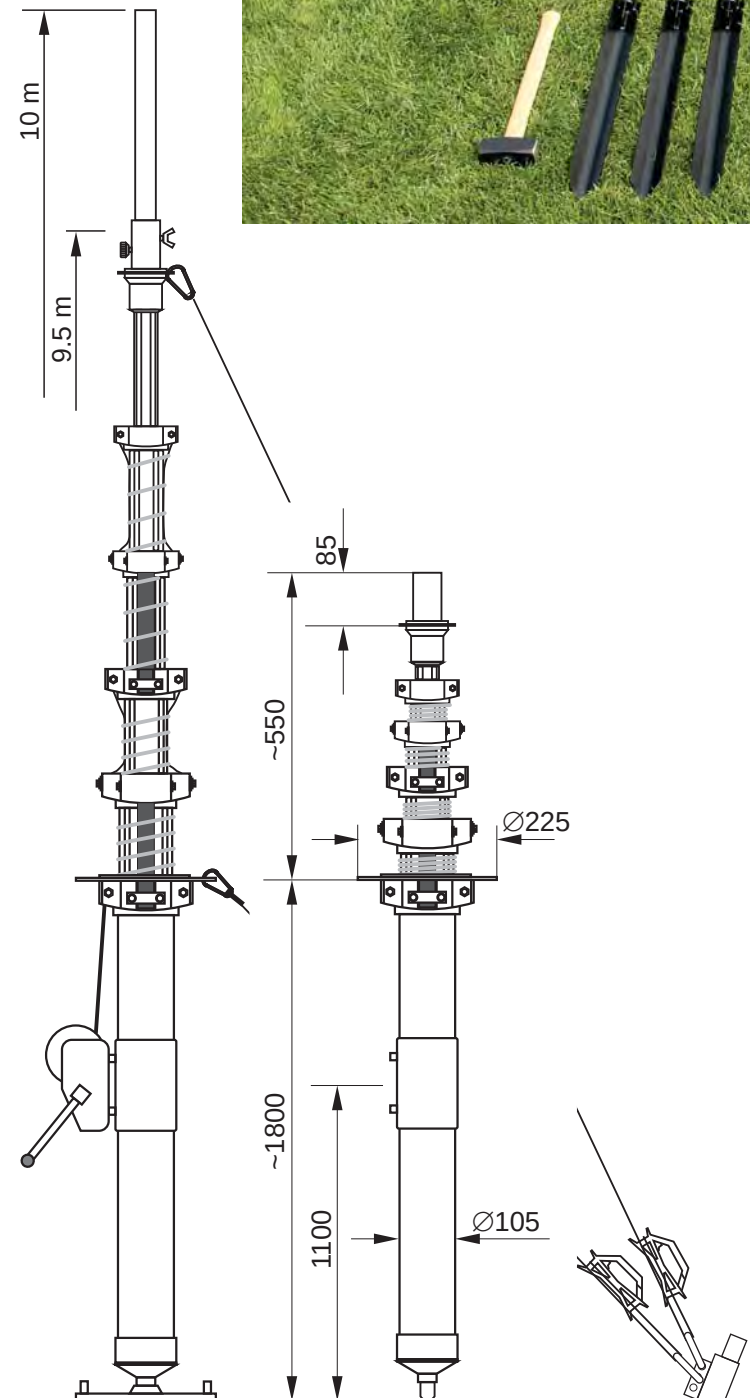


TECHNICAL SPECIFICATIONS	
System height (m)	10
Mast height (m)	9.5
Retracted length (m)	2.3
Bottom section diam. (mm)	105
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.35
Max. horizontal top load (N)	250
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	6
Mast weight (kg)	21.5
Accessories weight (kg)	27.5

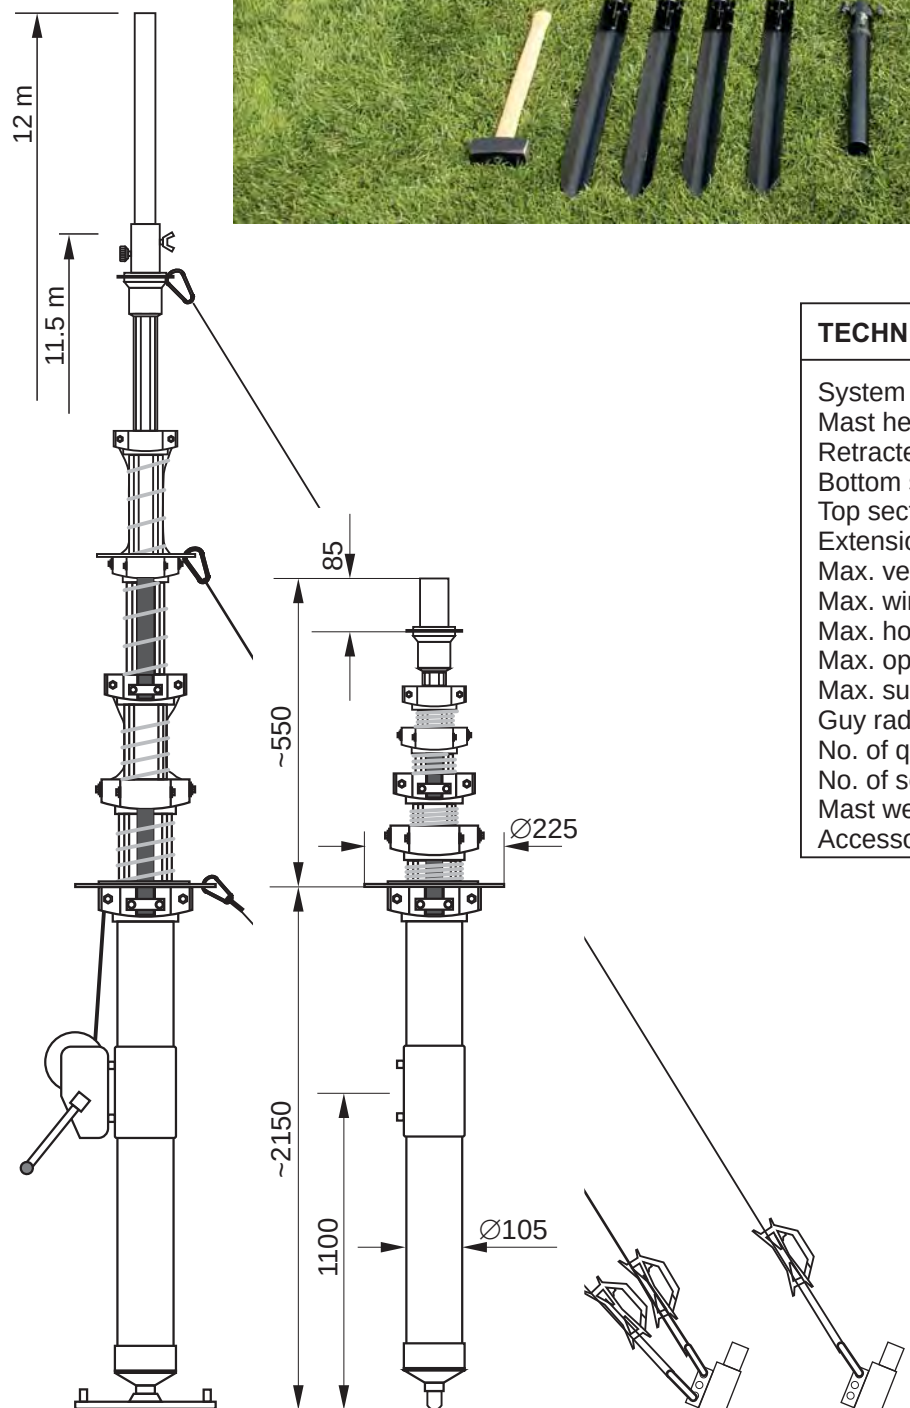

TECHNICAL SPECIFICATIONS


System height (m)	12
Mast height (m)	11.5
Retracted length (m)	2.7
Bottom section diam. (mm)	105
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.4
Max. horizontal top load (N)	287
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	8-10
No. of guys x levels	4 x 3
No. of sections	6
Mast weight (kg)	23.5
Accessories weight (kg)	34.0

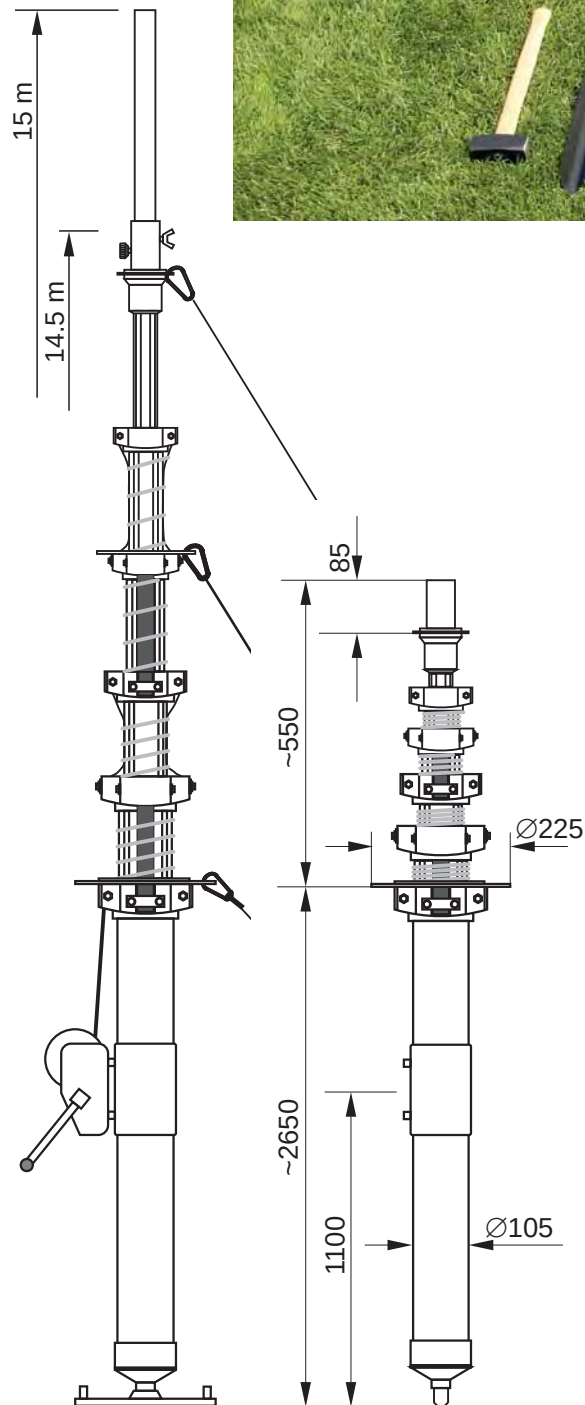


TECHNICAL SPECIFICATIONS

System height (m)	15
Mast height (m)	14.5
Retracted length (m)	3.2
Bottom section diam. (mm)	105
Top section diam. (mm)	50
Extension tube length (mm)	500
Max. vertical top load (kg)	25
Max. wind area CxA (m²)	0.35
Max. horizontal top load (N)	250
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	10-12
No. of guys x levels	4 x 3
No. of sections	6
Mast weight (kg)	25.5
Accessories weight (kg)	34.0



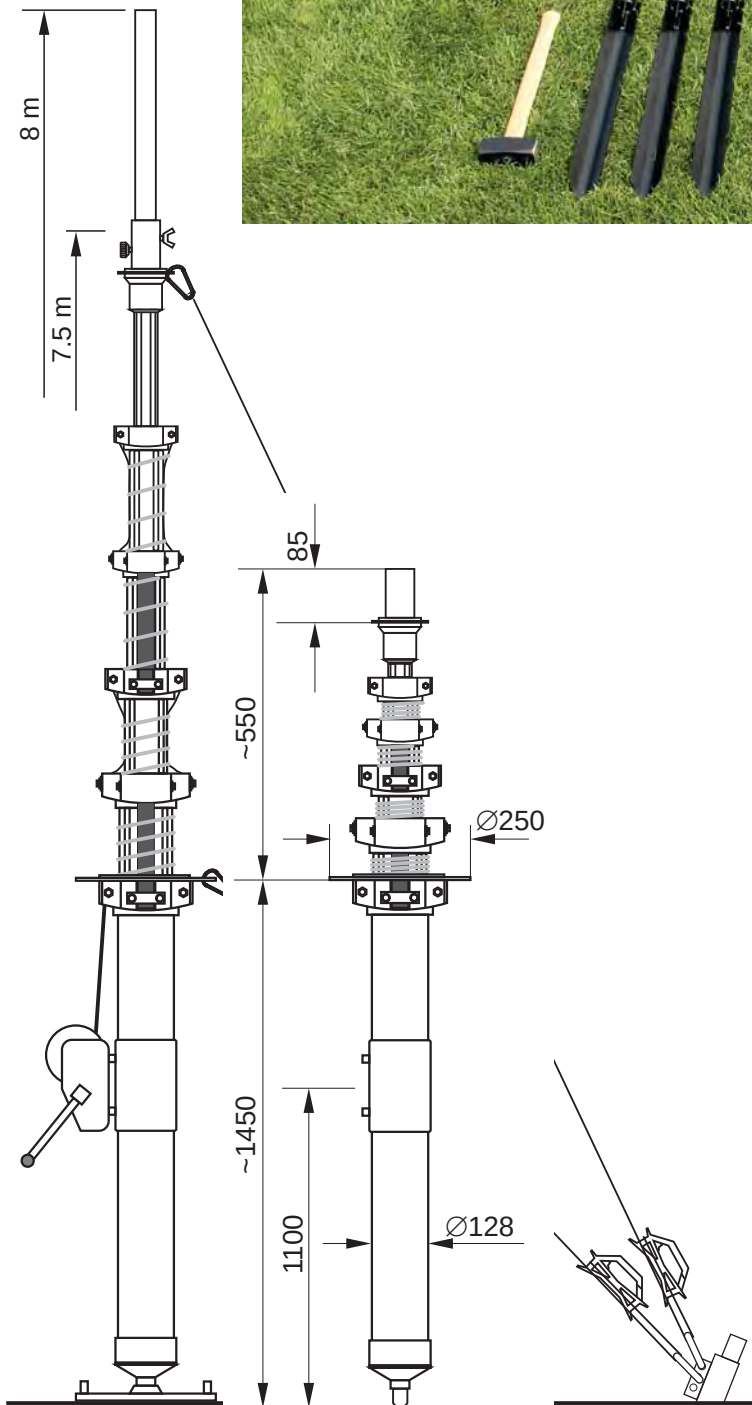


TECHNICAL SPECIFICATIONS	
System height (m)	8
Mast height (m)	7.5
Retracted length (m)	2.0
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.80
Max. horizontal top load (N)	570
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	8
Mast weight (kg)	27.0
Accessories weight (kg)	30.9

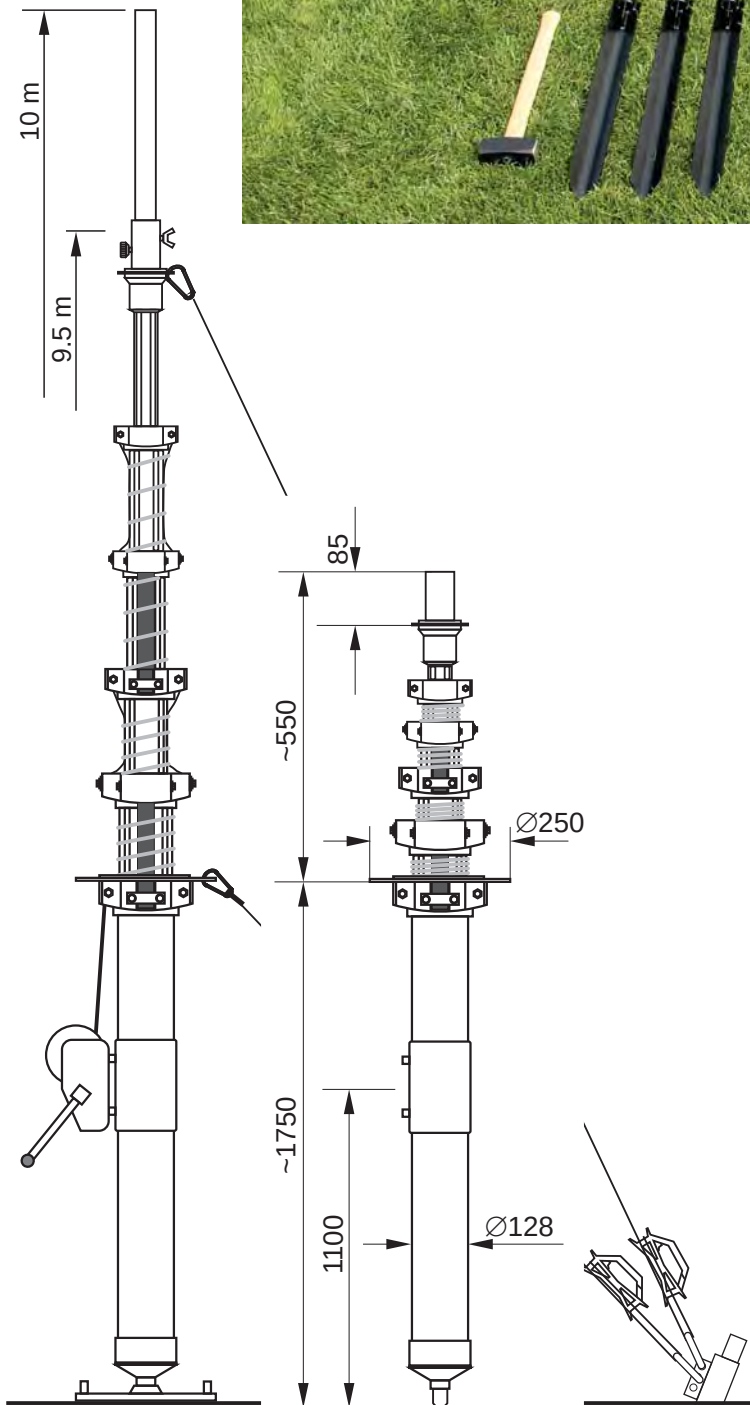

TECHNICAL SPECIFICATIONS

System height (m)	10
Mast height (m)	9.5
Retracted length (m)	2.3
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.70
Max. horizontal top load (N)	500
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	7
No. of guys x levels	4 x 2
No. of sections	6
Mast weight (kg)	30.0
Accessories weight (kg)	30.9




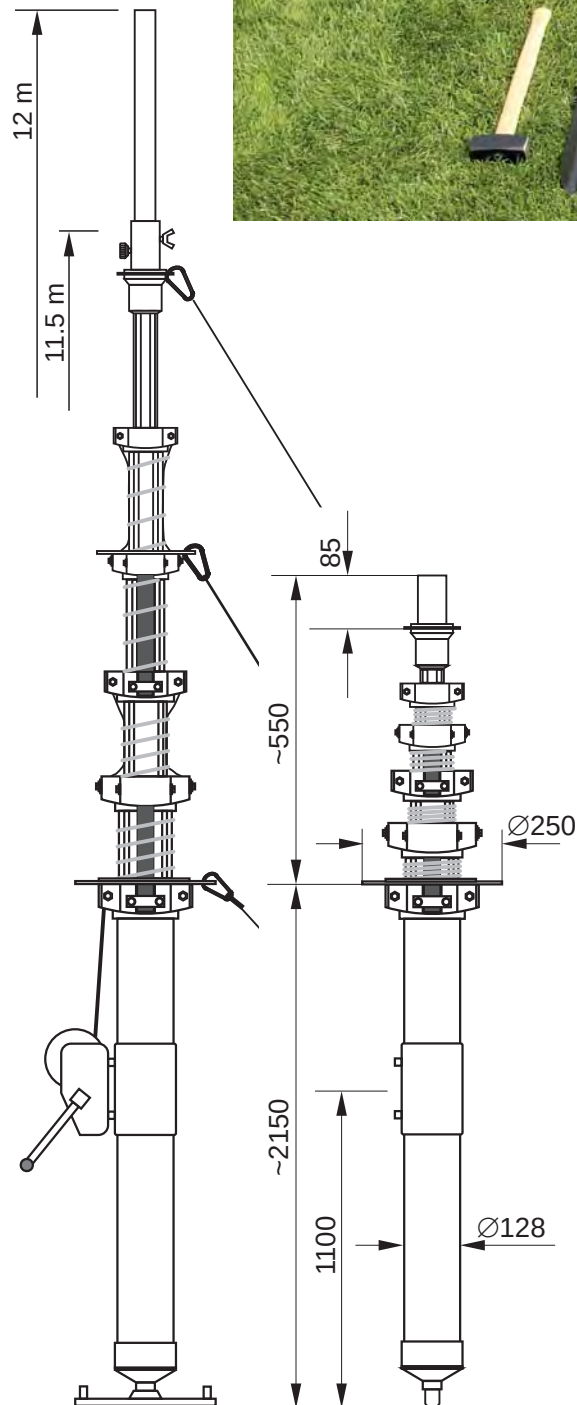


TECHNICAL SPECIFICATIONS


System height (m)	12
Mast height (m)	11.5
Retracted length (m)	2.7
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.80
Max. horizontal top load (N)	570
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	8-10
No. of guys x levels	4 x 3
No. of sections	6
Mast weight (kg)	35.1
Accessories weight (kg)	37.4



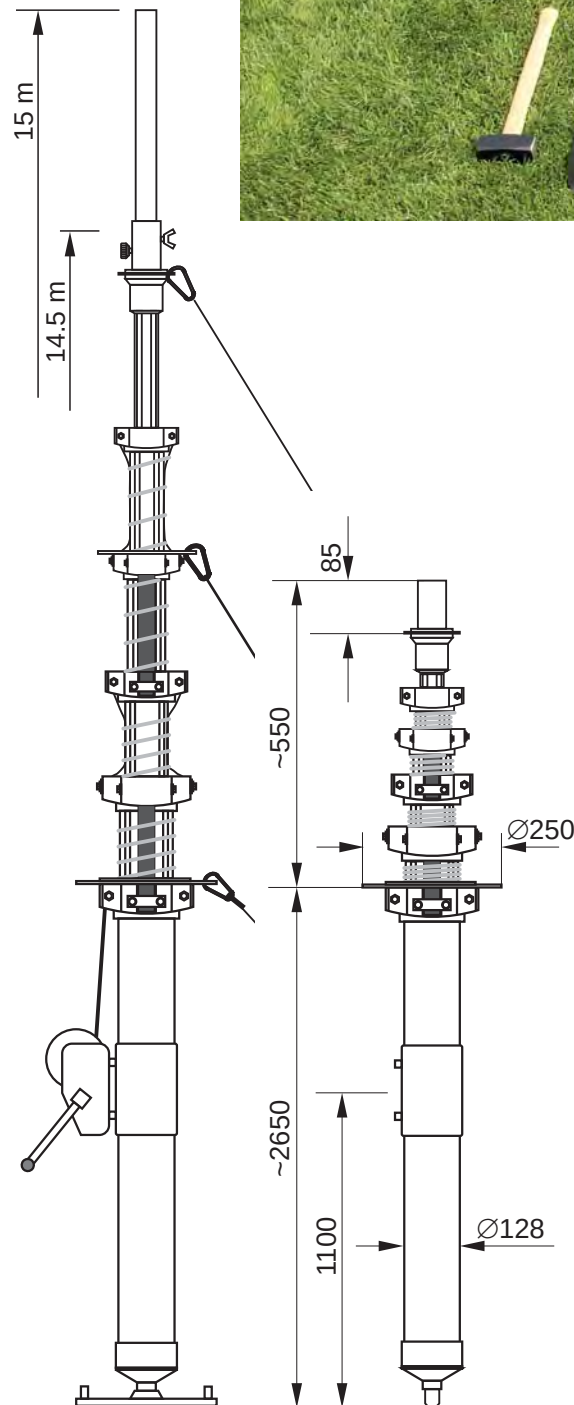


TECHNICAL SPECIFICATIONS	
System height (m)	15
Mast height (m)	14.5
Retracted length (m)	3.2
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.80
Max. horizontal top load (N)	570
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	10-12
No. of guys x levels	4 x 3
No. of sections	6
Mast weight (kg)	39.9
Accessories weight (kg)	48.7

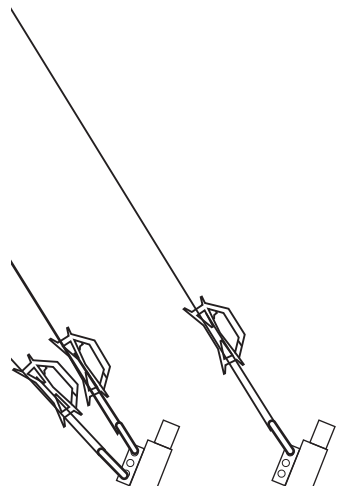


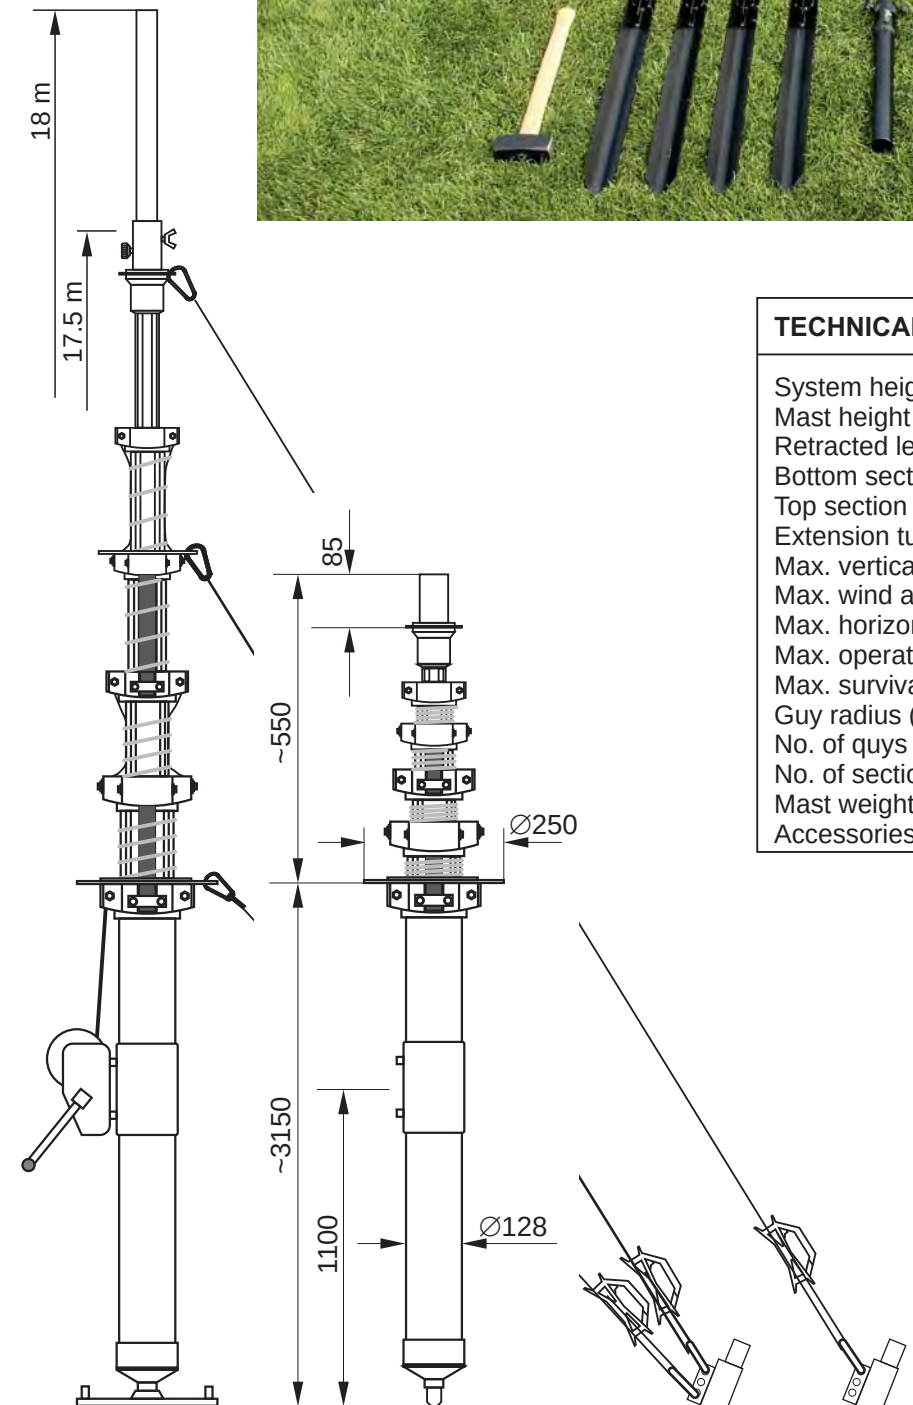


TECHNICAL SPECIFICATIONS

System height (m)	18
Mast height (m)	17.5
Retracted length (m)	3.7
Bottom section diam. (mm)	128
Top section diam. (mm)	71.5
Extension tube length (mm)	500
Max. vertical top load (kg)	35
Max. wind area CxA (m ²)	0.60
Max. horizontal top load (N)	430
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	10-12
No. of guys x levels	4 x 3
No. of sections	6
Mast weight (kg)	44.7
Accessories weight (kg)	48.7

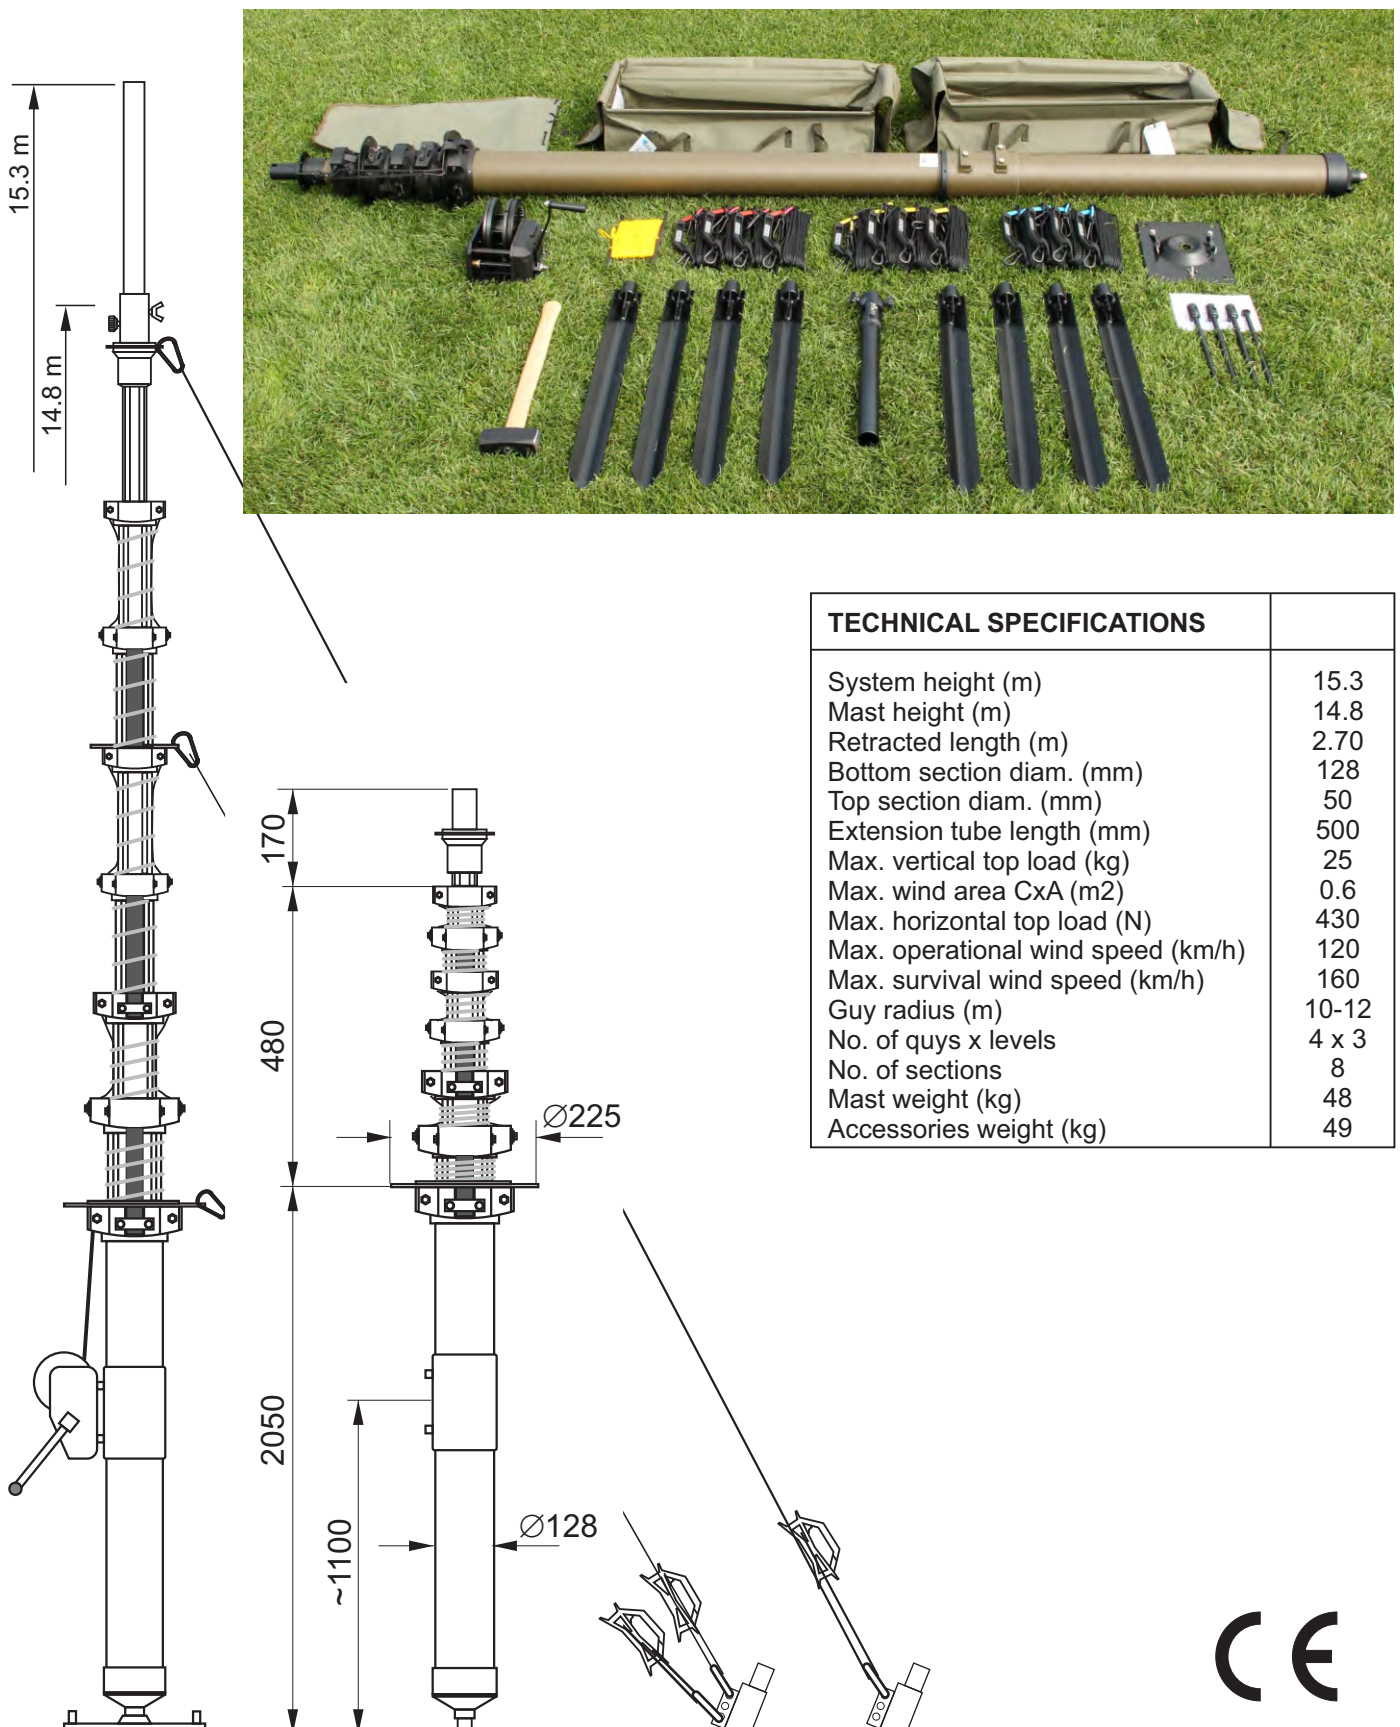

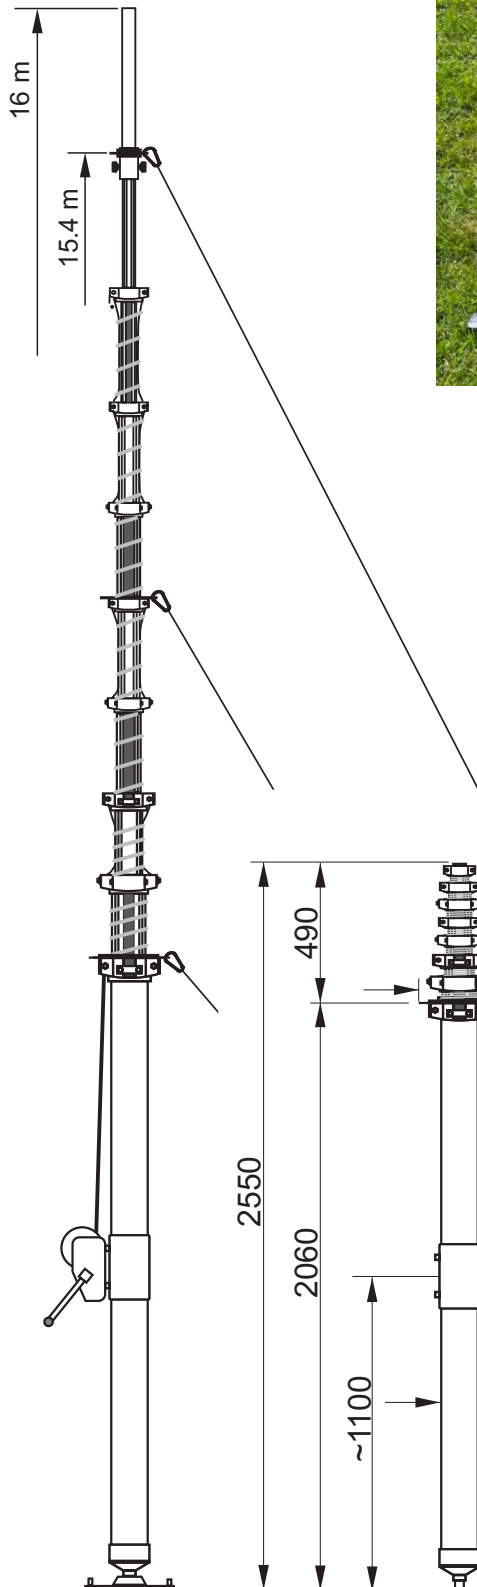

CE

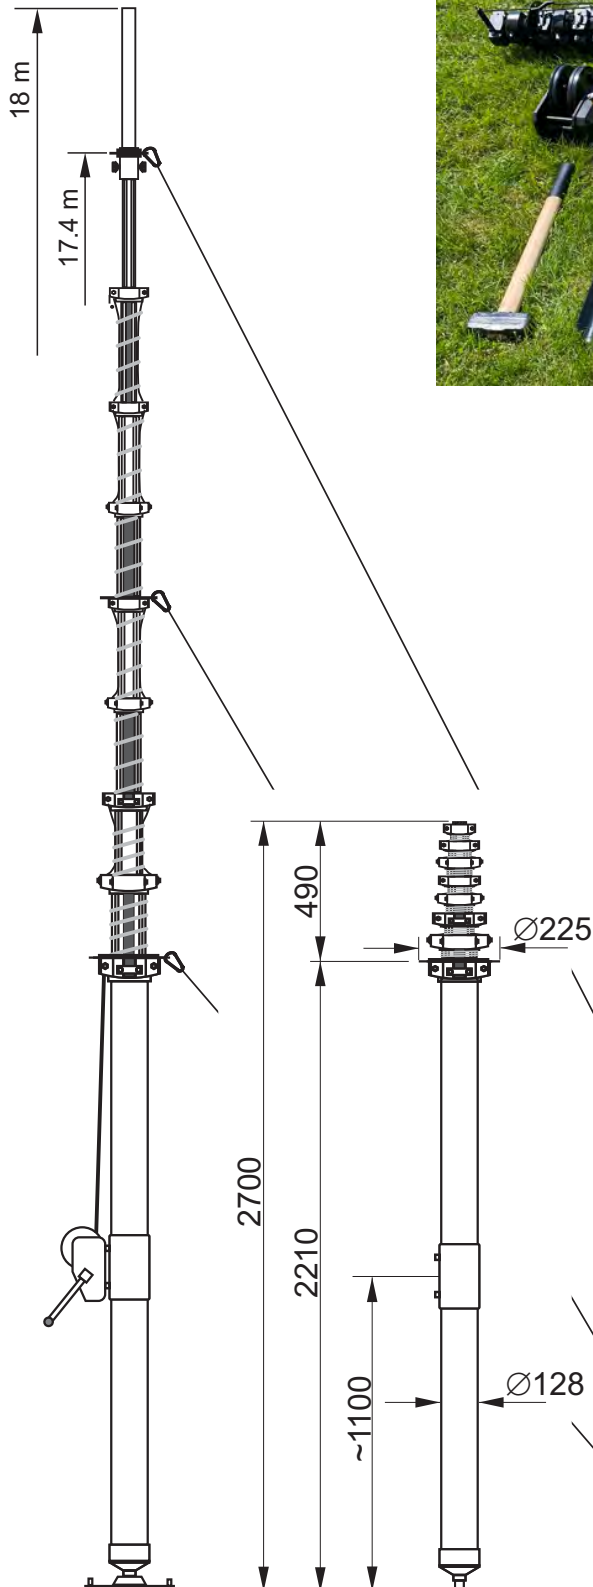

TECHNICAL SPECIFICATIONS

System height (m)	18.0
Mast height (m)	17.4
Retracted length (m)	2.7
Bottom section diam. (mm)	128
Top section diam. (mm)	43.5
Extension tube length (mm)	600
Max. vertical top load (kg)	25
Max. wind area CxA (m ²)	0.4
Max. horizontal top load (N)	286
Max. operational wind speed (km/h)	120
Max. survival wind speed (km/h)	160
Guy radius (m)	10-12
No. of guys x levels	4 x 3
No. of sections	9
Mast weight (kg)	42.4
Accessories weight (kg)	39.6




Electric winch drive type STV-EW is intended to be used with winch driven telescopic masts type STV. STV-EW is an add-on product to the hand-driven winch type 651 or 501. It enables easier elevating and retracting of the mast by wire remote control unit especially in case of higher mast heights and heavier loads.

The electric winch unit mechanically consists of a 24V electric motor and worm gearbox with torque limiter. It is laterally attached to the manual winch on the position of the handle and easily secured with 2 stand screws by hand (no tool is required). A remote control together with high power contactors is used for elevating or lowering the mast. In case of electric failure, the electric winch can be removed and mast manually operated by the handle. Winch has also a torque limiter to prevent any possible mast damages and automatic fuse to prevent electrical current overdraw.

On average the electric drive STV-EW can elevate fully loaded mast STV-18/128 in approx. 1 minute time.

TECHNICAL SPECIFICATIONS	
Lifting speed (under load, average)	App. 1 minute for 18 meter mast
Supply Voltage	24V DC (min. 20 V - max. 32 V)
Supply Current	up to 32A nominal
Power consumption	up to 720W nominal
Power delivered	600W
Winch dimensions	500 x 170 x 200 mm
Weight	11.2 kg (STV-EW) + 5.2 kg (bag, 2 cables)
Power supply wire length	15 m
Remote control wire length	5 m
Temperature:	
- operating	-25 ... +55 °C
- storage	-40 ... +80 °C
Environmental protection	IP55

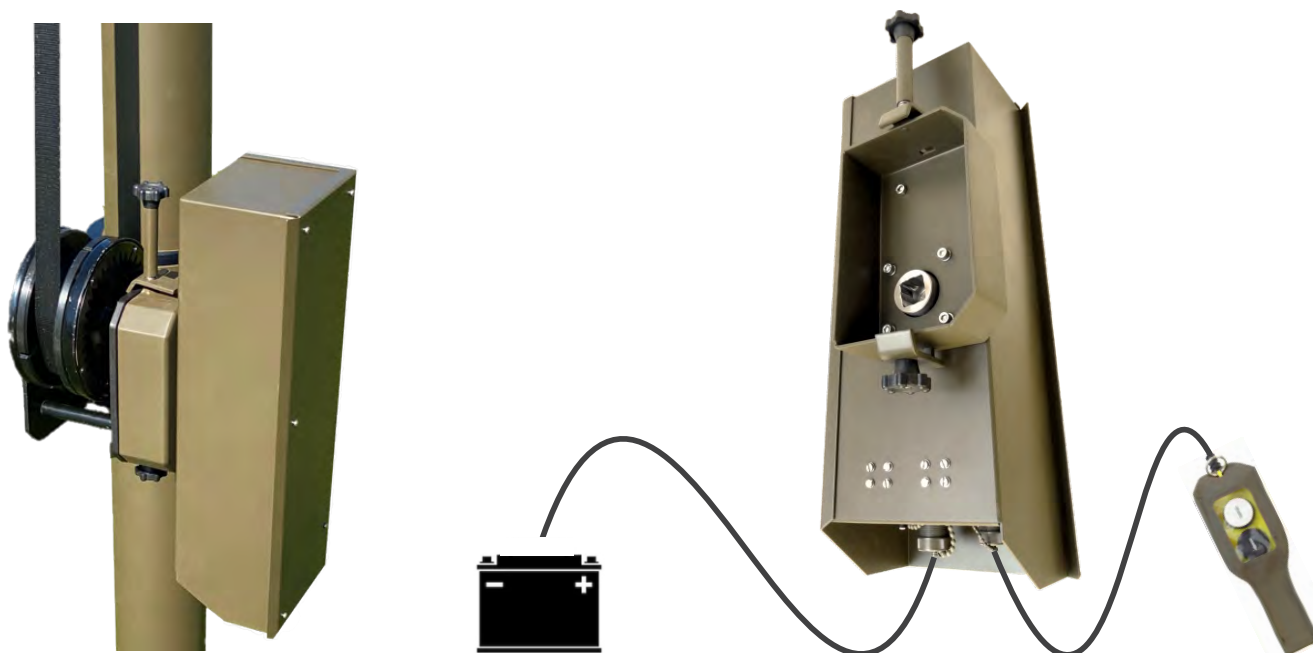

Versions:

STV-EW-651: Electric drive for STV telescopic masts using Winch 651

STV-EW-501: Electric drive for STV telescopic masts using Winch 501