

Very High-Power LPDA

100 – 500 MHz

Product Code: LPDA-A0102

VERSION: 1.3



SPECIFICATIONS:

Electrical:	
Frequency range	100 – 500 MHz
VSWR	2.5 :1
Nominal input impedance	50 Ω
Gain on horizon	7 dBi typical
Elevation 3 dB beamwidth	50°
Azimuth 3 dB beamwidth	110°
Polarisation	Linear, adjustable vertical and horizontal
MTBF	50,000 hrs
Feed power handling	5 kW CW
Connectors	1 5/8" female
Mechanical:	
Dimensions (w x l)	1500 mm x 1920 mm
Material	Aluminium, stainless steel, fibreglass
Total mass	14 kg (incl. mast) 8 kg (excl. mast)
Mounting	Off-centre on 1.1 m isolation pole (supplied)
Environmental: designed to meet the following specifications	
Wind survival on mast	160 km/h (calculated)
Temperature range	- 30 °C (no icing) to + 65 °C

PRODUCT FEATURES:

- Low VSWR and high gain over the frequency band
- High feed power handling of 5 kW
- Vertical and horizontal polarisation
- Easy to assemble and disassemble
- Rugged construction

PRODUCT APPLICATIONS:

- Wideband monitoring
- High-power applications

PRODUCT DESCRIPTION:

The LPDA-A0102 is a directional log-periodic dipole array that covers the frequency band 100 to 500 MHz at 5 kW of feed power with a typical gain of 7 dBi. Off-centre mounted on a supplied isolation pole.

Polarisation is adjustable between vertical and horizontal via the mounting bracket.

This antenna can be customized for frequencies in a wideband of frequencies with excellent gain, VSWR and higher power handling.

Very High-Power LPDA


100 – 500 MHz

Product Code: LPDA-A0102


VERSION: 1.3

VSWR AND GAIN GRAPHS:

Typical VSWR:

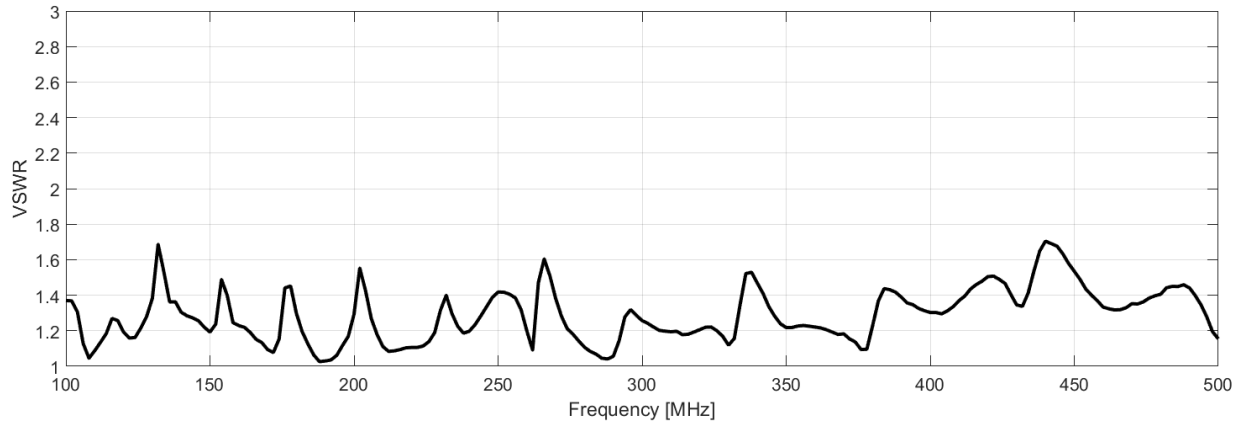

Measured Gain:

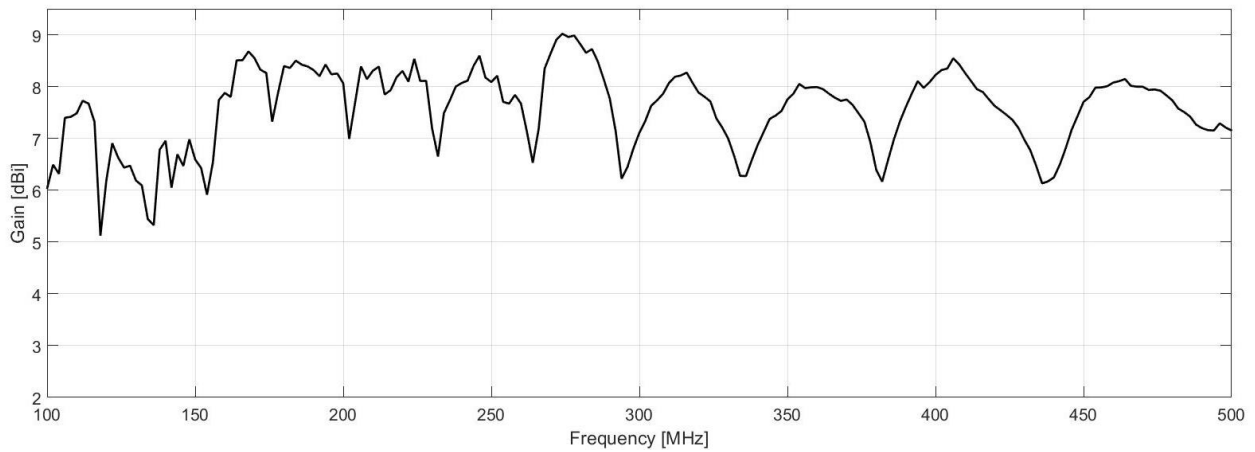

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned

**GAIN THE
ADVANTAGE**


Very High-Power LPDA

100 – 500 MHz

Product Code: LPDA-A0102

VERSION: 1.3

Normalised radiation patterns: E-plane:

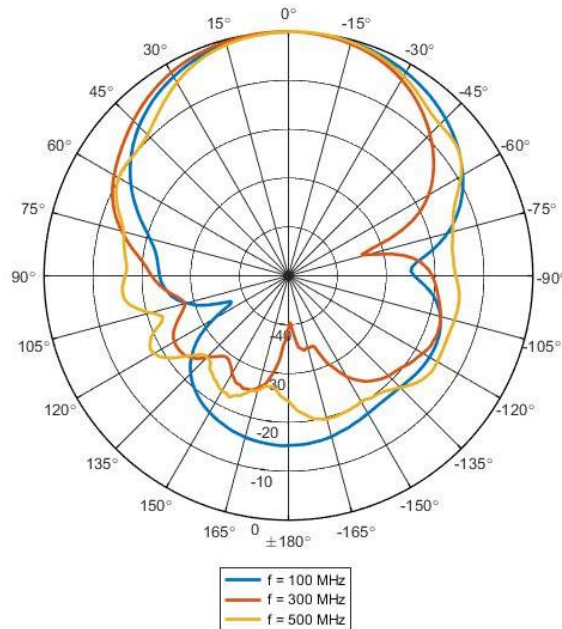

H-plane:

