

Wideband LPDA Antenna

800 – 6000 MHz

Product Code: LPDA-A0123



SPECIFICATIONS:

Product code:	
LPDA-A0123	7/16 (f) connector
LPDA-A0123-01	N-type (f) connector
Electrical:	
Frequency range	800 – 6000 MHz
VSWR	< 2.0:1
Nominal input impedance	50 Ω
Feed power handling	See graph below
Gain	> 10 dBi typical
Polarisation	Linear (vertical and horizontal)
Mechanical:	
Dimensions (d x l)	203 mm x 1000 mm including bracket
Weight	6 kg (including mounting bracket)
Material	Stainless steel, plastic and fibreglass
MTBF	75000 hours
Environmental: designed to meet the following specifications	
Wind survival	160 km/h calculated
Temperature (operational)	-30 °C to +65 °C (no icing)
Water and dust resistance	IP65

ELECTRICAL FEATURES:

- High feed power handling of 100 W @ 6 GHz
- Low VSWR
- High gain over the band
- Rugged design

APPLICATIONS:

- Wideband monitoring
- High-power transmissions

PRODUCT DESCRIPTION

This LPDA is a directional log-periodic dipole array that is primarily designed for high-powered transmit applications. It covers the frequency band of 800 to 6000 MHz at 100 W of power @ 6 GHz, with a typical gain of 10 dBi.

The antenna is easily mounted at the rear for either vertical or horizontal polarisation.

This antenna can be customised if required, for different frequency ranges.

Wideband LPDA Antenna


800 – 6000 MHz

Product Code: LPDA-A0123


VERSION: 1.3

VS WR AND GAIN GRAPHS:

MEASURED VS WR:

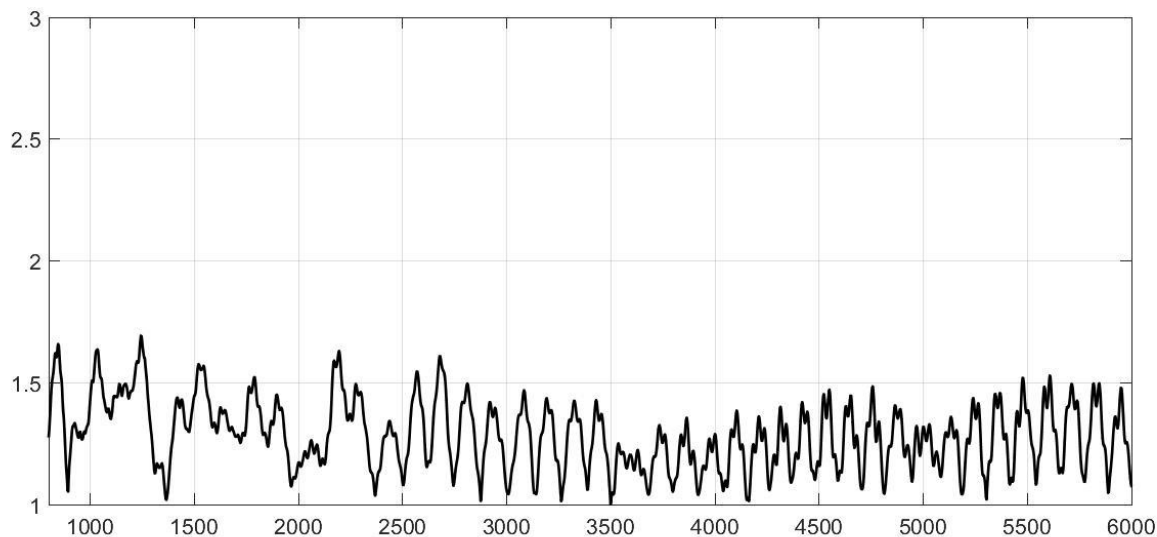

MEASURED GAIN:

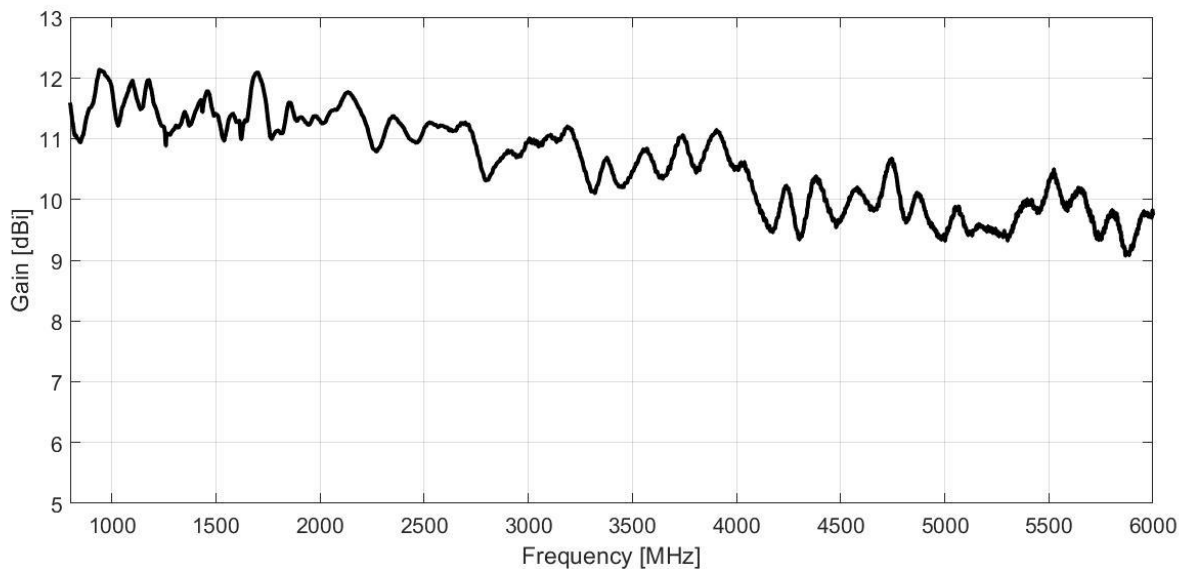

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675



**GAIN THE
ADVANTAGE**


Wideband LPDA Antenna

800 – 6000 MHz

Product Code: LPDA-A0123

VERSION: 1.3

POWER HANDLING:

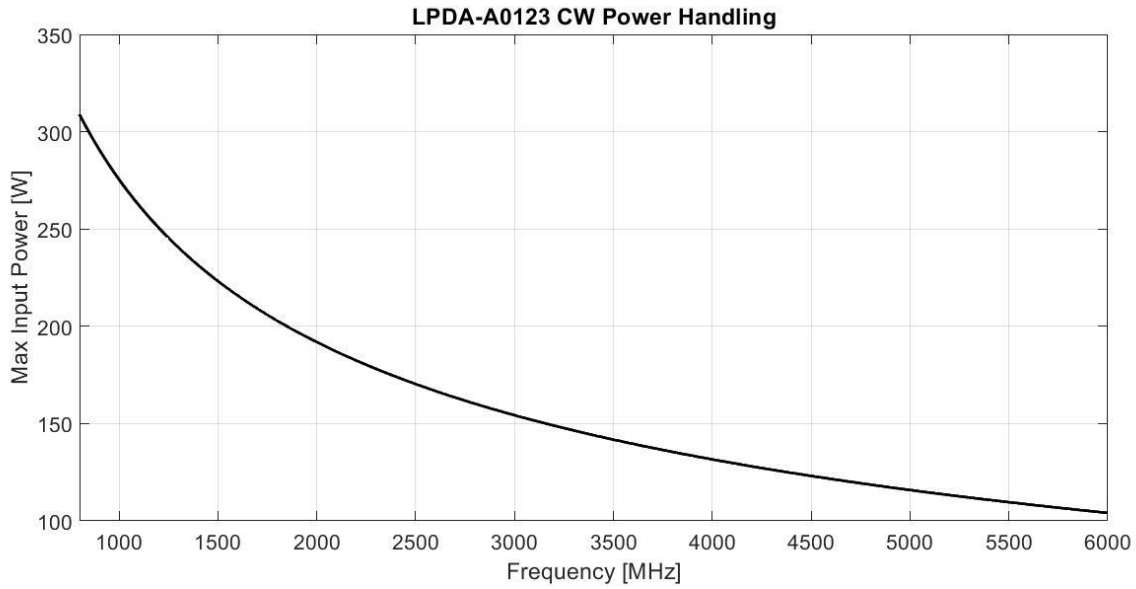

AUTHORIZED USA DISTRIBUTION BY:

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675



GAIN THE ADVANTAGE