

The AD-25/WB-3512-LW is a wideband VHF/UHF low weight dipole ("center-fed") antenna, primarily intended for use with manpack portable radio units in VHF/UHF frequency range from 30 to 512 MHz. Electrically the antenna is optimized for all exploitation conditions (portable radio unit on operator body, hand, ground, etc.) so it is not necessary to additionally tune the antenna. The antenna is composed of six basic elements (from the bottom up): Current-choke unit, flexible goose-neck, matching unit, flexible goose-neck, coil unit and tape radiator. Current-choke unit allows antenna to be independent of the portable radio unit and so forms a correct dipole shape. Flexible goose-neck allows bending the antenna to be always in vertical position. Matching unit with a special built-in passive transformer tuning network is enclosed in a plastic housing. Most of the antenna metal parts are made of aluminium which makes significant impact on a weight. Tape radiator is made of flexible tapes covered with a plastic tube ensuring high flexibility and roughness. Antenna connector is TNC male.




| | |
|--|-----------------------------------|
| ELECTRICAL SPECIFICATIONS | |
| Frequency range | 30 - 512 MHz |
| Impedance | 50 ohm |
| VHF VSWR | VHF (30 - 225 MHz) < 3.5 |
| UHF VSWR | UHF (225 - 512 MHz) < 3 |
| VHF Gain | VHF (30 - 225 MHz) -20 ... -3 dBi |
| UHF Gain | UHF (225 - 512 MHz) -3 ... +3 dBi |
| Polarization | Vertical |
| Maximum power | 10 W CW |
| Connector | TNC male |
| MECHANICAL SPECIFICATIONS | |
| Design | VHF/UHF Dipole Antenna |
| Height | 1295 mm |
| Weight | 360 g |
| Diameter | 20,3 mm |
| Temperature range - in use | -50 ... +55 °C |
| Temperature range - in stock | -55 ... +75 °C |
| Color | Black |
| ENVIRONMENTAL SPECIFICATIONS (per MIL-STD-810G) | |
| High Operating Temperature | +85 °C Method 501.5 Proc. II |
| Low Operating Temperature | -40 °C Method 502.5 Proc. II |
| High Temperature Storage | +85 °C Method 501.5 Proc. I |
| Low Temperature Storage | -50 °C Method 502.5 Proc. I |
| Humidity | Method 507.5 Proc. II |
| Salt Fog | Method 509.5 |
| Vibration | Method 514.6 Proc. I |
| Immersion | Method 512.5 Proc. I |
| Rain | Method 506.4 Proc. II |
| Sand and Dust | Method 510.5 Proc. I |
| Solar Radiation | Method 505.5 Proc. I |
| Fungus | Method 508.5 |
| Altitude | Method 500.5 Proc. I |

**AUTHORIZED USA
DISTRIBUTION BY:**


Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675




customer attuned

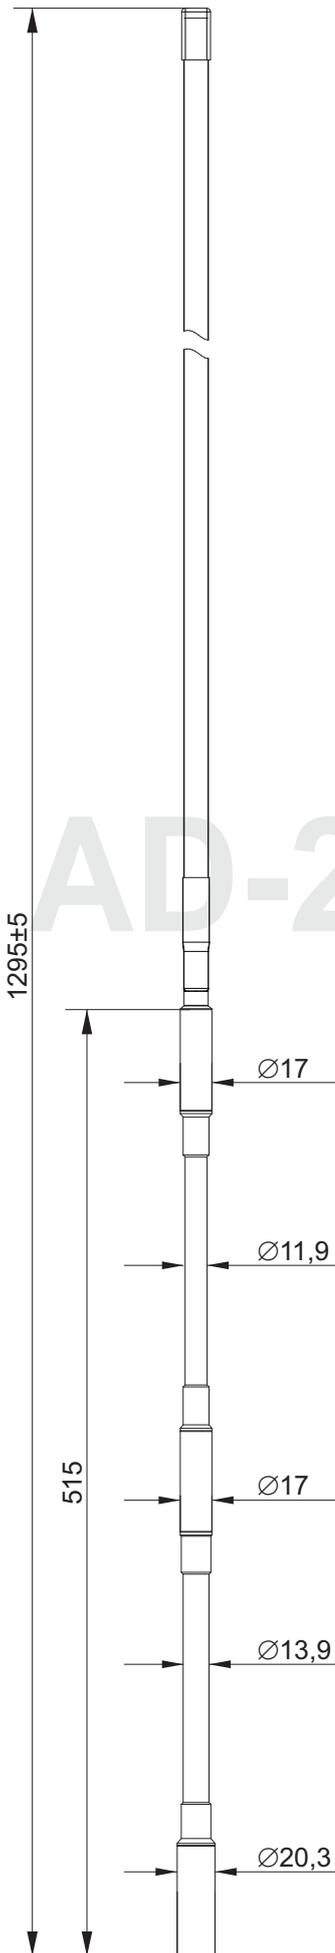

VSWR

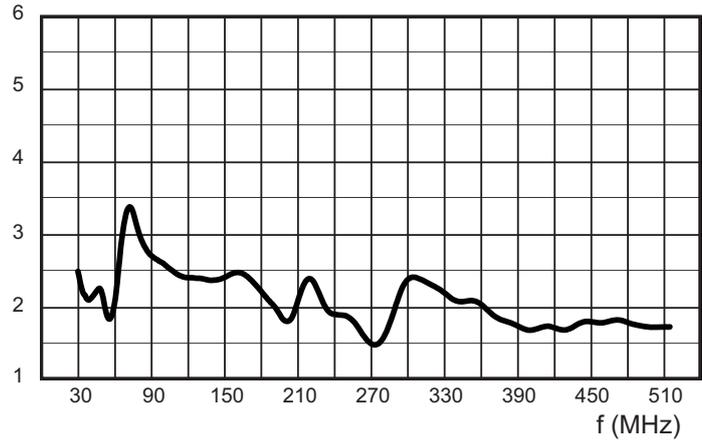

Gain

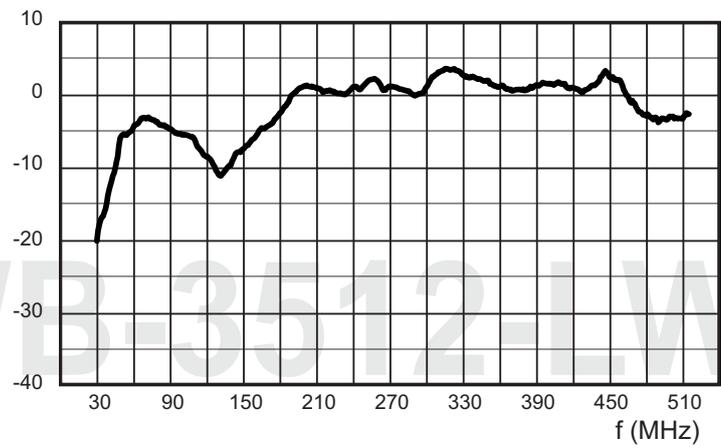

AD-25/WB-3512-LW

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned