

High-Power Maritime Omni Directional Antenna

960 - 1215 MHz

Product Code: OMNI-A0376

VERSION: 1.1



PRODUCT DESCRIPTION:

The OMNI-A0376 is a High-Power Omni Directional transmit / receive antenna with excellent performance over the entire link 16 band, 960 – 1215 MHz.

The antenna offers very low azimuth ripple of below 1.5 dB and its split radome design offers wrap around mast mounting. It is designed to meet environmental specifications suitable for naval applications.

PRODUCT FEATURES:

- High power handling
- Wrap around mast mount
- Transmit / Receive antenna
- Low RCS

APPLICATIONS:

- Communications
- Monitoring
- Naval

SPECIFICATIONS:

Electrical:	
Frequency range	960 – 1215 MHz
VSWR	< 2.1:1
Gain	> 4.5 dBi (typical)
— -····	± 1.5 dB
Azimuth ripple	
Polarisation	Vertical
Nominal input impedance	50 Ω
Connectors	1 x N-type female
Power	1kW peak for a 36% duty cycle
Mechanical:	
Dimensions (±10%):	
Upper diameter:	900 mm
Lower diameter:	1100 mm
Height:	550 mm
Total mass:	< 65 kg
Mounting method	Wrap around mast mount
Mounting method	Wrap around mast mount
Environmental: designed t	o meet the following specifications
MIL-STD-810G Change 1	Method / specification
Temperature range	501.6 procedure I and II, 502.6
	procedure I and II.
	Storage: -25 °C to +71 °C
	Operation: -25 °C to +60 °C
Rain	506.6 procedure I
	30 mm/h rainfall with a 35-knot wind
Humidity	507.6
	+30 °C to +60 °C, RH = 90%
Salt fog	509.6
Solar radiation	505.6 procedure II
Colai radiation	
Sand and dust	
Sand and dust	510.6 procedure I and II
Sand and dust Fungus	510.6 procedure I and II 508.7
Fungus	510.6 procedure I and II 508.7 528.1
	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz
Fungus	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz
Fungus	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7
Fungus	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7 Vertical: 50g and 6ms half-sine pulse
Fungus Vibration	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7 Vertical: 50g and 6ms half-sine pulse Horizontal: 30g and 11ms half-sine
Fungus Vibration Shock	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7 Vertical: 50g and 6ms half-sine pulse
Fungus Vibration Shock Other	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7 Vertical: 50g and 6ms half-sine pulse Horizontal: 30g and 11ms half-sine pulse
Fungus Vibration Shock	510.6 procedure I and II 508.7 528.1 1mm over frequency 4 – 14 Hz 0.8g over frequency 14-100 Hz 516.7 Vertical: 50g and 6ms half-sine pulse Horizontal: 30g and 11ms half-sine

AUTHORIZED USA DISTRIBUTION BY:


Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675




High-Power Maritime Omni Directional Antenna

960 - 1215 MHz

Product Code: OMNI-A0376 VERSION: 1.1

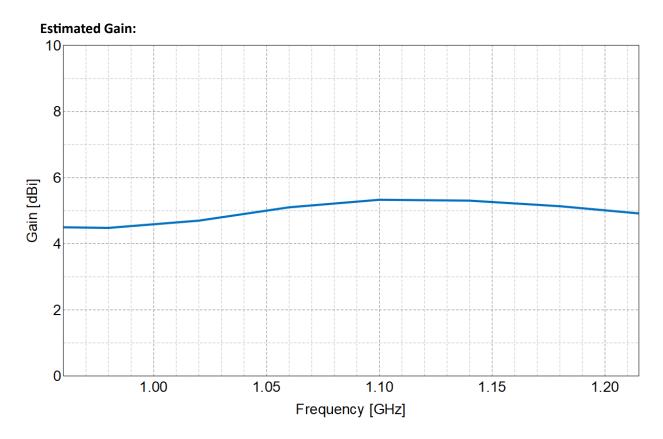

Estimated VSWR

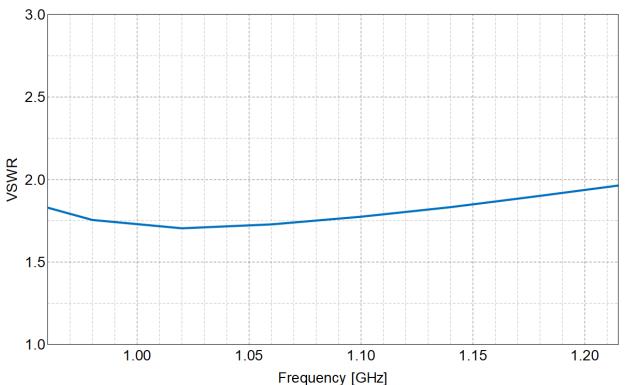

AUTHORIZED USA DISTRIBUTION BY:

Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675

