



### SPECIFICATIONS:

<b>Electrical:</b>	
Frequency range	400 – 3000 MHz
VSWR	< 2:1
Nominal input impedance	50 $\Omega$ DC grounded
Connector	N-type female
Feed power handling	250 W CW
Gain	> 6.5 dBi typical
E-plane 3 dB beamwidth	$\geq 65^\circ$
H-plane 3 dB beamwidth	$\geq 110^\circ$
Polarisation	Vertical / horizontal Configurable at installation
Front-to-back ratio	$\geq 15$ dB
<b>Mechanical:</b>	
Dimensions (l x w x h)	< 720 mm x 80 mm x 470 mm
Material	Aluminium, fibreglass
Total mass	< 10 kg incl. mounting bracket
Mounting method	Bracket onto a mast
Packaging	Transportable bag or crate
MTBF	500,000 h
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	160 km/h
Temperature	-35 °C to 71 °C
Effective wind area	0.3 m <sup>2</sup>
Corrosion	Appropriate anti-corrosion measures are taken in the design of antenna for harsh environmental conditions.

### PRODUCT FEATURES:

- Wideband frequency 400 to 3000 MHz
- VSWR < 2.0:1
- Moderate gain: 6.5 dBi
- Rugged construction
- Ice resistant

### PRODUCT APPLICATIONS:

- Wideband high-power

### PRODUCT DESCRIPTION:

The LPDA-A0112 directional log-periodic dipole array (LPDA) is designed for high-power applications. It covers a frequency band of 400 to 3000 MHz with a gain of 6.5 dBi.

The antenna is completely encapsulated in a radome. The antenna is provided with a mounting bracket allowing it to be mounted for horizontal or vertical polarisation

# High-Power LPDA Antenna


400 – 3000 MHz

Product Code: LPDA-A0112


VERSION: 1.4

## VSWR AND GAIN GRAPHS:




### SIMULATED VSWR:

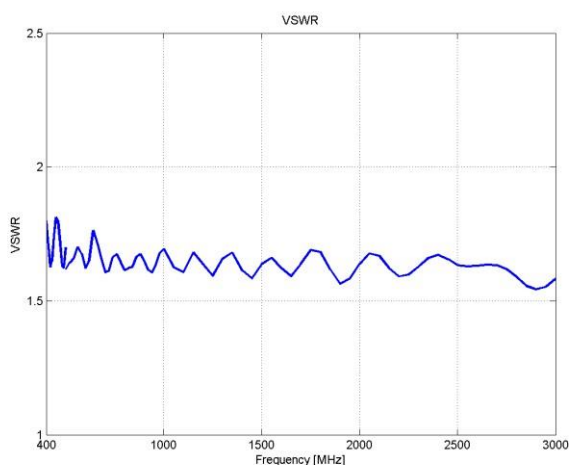

### SIMULATED GAIN:

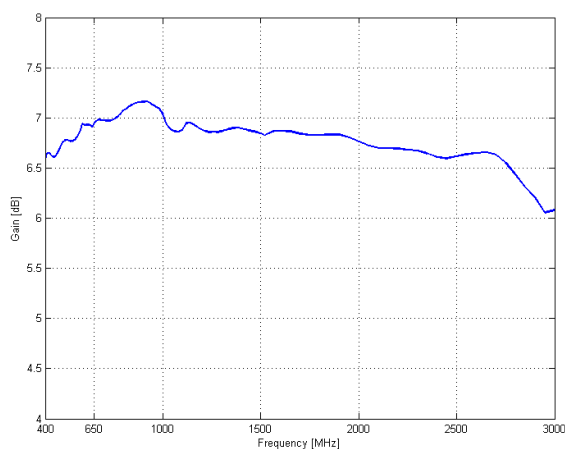

## RADIATION PATTERNS:

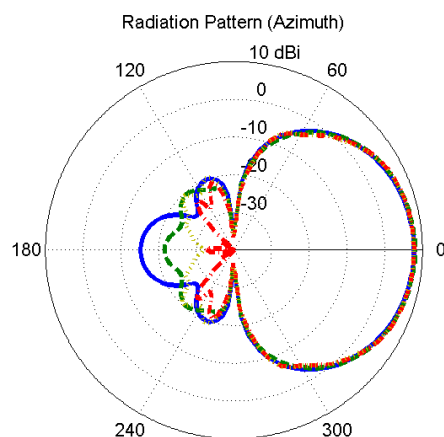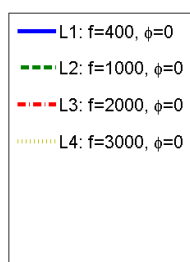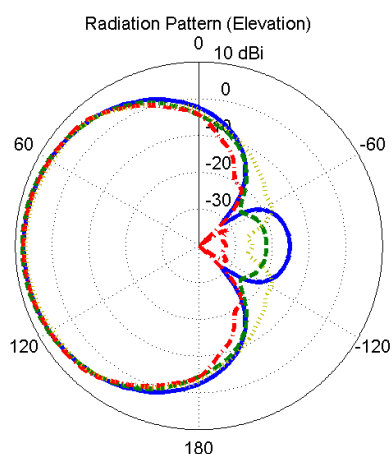

## AUTHORIZED USA DISTRIBUTION BY:

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
sales@cyntony.com  
781-430-0675

cyntony  
customer attuned