





The antenna AD-55/E is wideband manpack antenna intended for use with modern broadband software-defined radios (SDR) and other radio devices (jammers, scanners, etc.). The antenna is a sleeve dipole center fed design thus enable to work without the presence of the ground plane. The radiation part of the antenna is fully enclosed in a fiberglass radome. The antenna construction is rugged and intended for use in the harshest military environments. The antenna connector is N male.

<b>ELECTRICAL SPECIFICATIONS</b>	
Frequency range	700 - 920 MHz
Impedance	50 ohm
VSWR	< 2:1 typical (see diagram)
Gain	+2 ... +4 dBi
Polarization	Vertical
Maximum power	200 W CW
Connector	N male
<b>MECHANICAL SPECIFICATIONS</b>	
Design	UHF Dipole Antenna
Height	315 mm
Weight	435 g
Diameter	28 mm
Color	Black
<b>ENVIRONMENTAL SPECIFICATIONS (perMIL-STD-810G)</b>	
High Operating Temperature	+65 °C Method 501.5 Proc. II
Low Operating Temperature	-40 °C Method 502.5 Proc. II
High Temperature Storage	+75 °C Method 501.5 Proc. I
Low Temperature Storage	-55 °C Method 502.5 Proc. I
Humidity	Method 507.5 Proc. II Method
Salt Fog	509.5 Method 514.6 Proc. I
Vibration	Method 512.5 Proc. I Method
Immersion	506.4 Proc. II Method 510.5
Rain	Proc. I Method 505.5 Proc I
Sand and Dust	Method 508.5 Method 500.5
Solar Radiation	Proc. I
Fungus	
Altitude	



**Frequency ranges of AD-55 antenna models:**

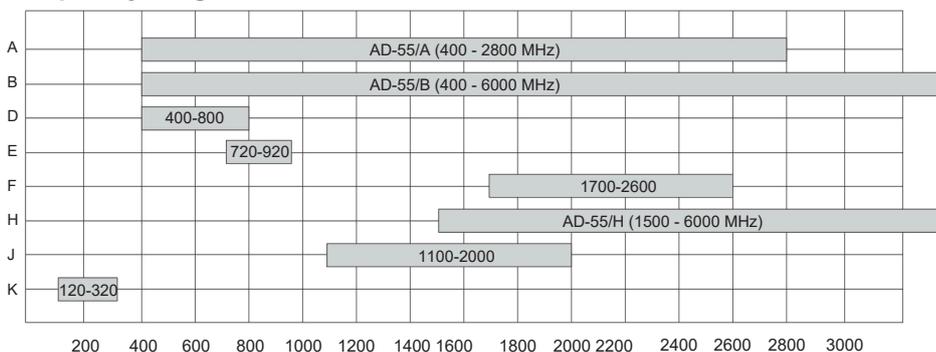

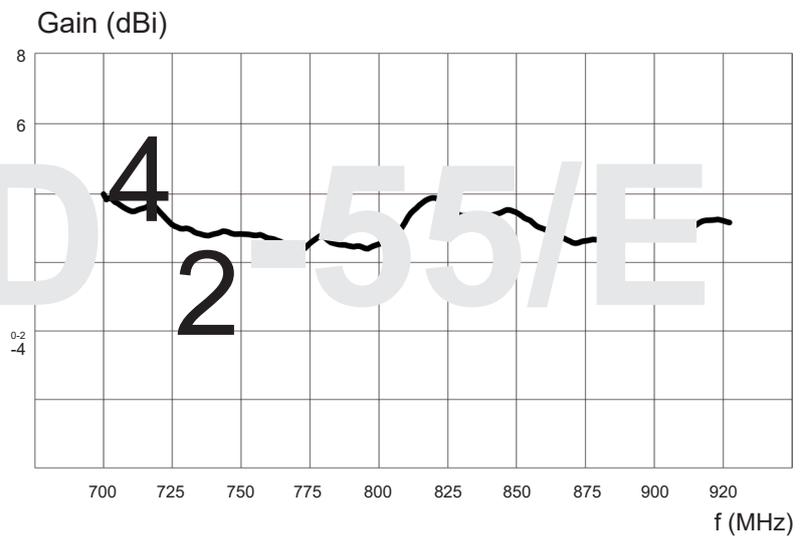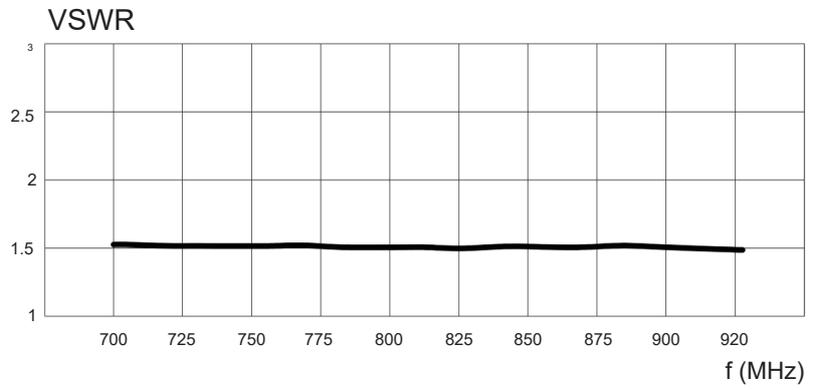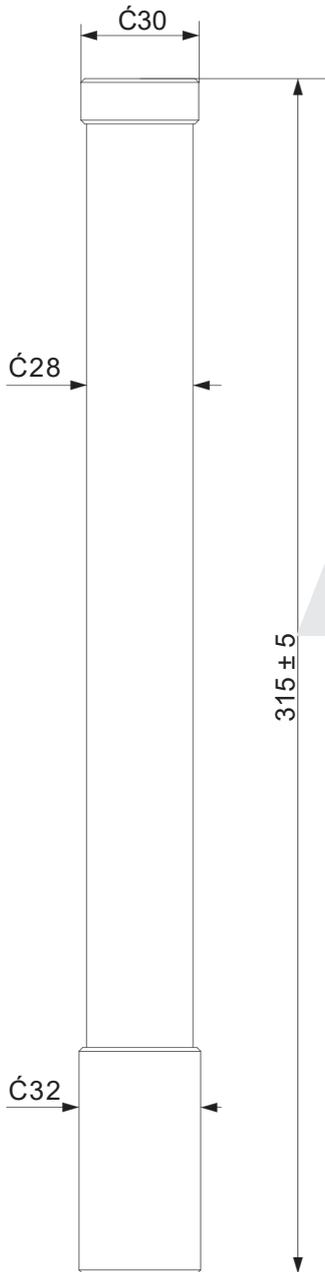

AD4-55/E  
2

**AUTHORIZED USA  
DISTRIBUTION BY:**

Cyntony Corporation  
195 Follen Road  
Lexington, Massachusetts  
sales@cyntony.com  
781-430-0675

