



Family of antennas AD-26/C is intended for use with portable and manpack radios within VHF frequency band. The antenna is composed of several thin wall stainless steel sections connected with elastic rope. Elastic rope tension enables good electrical contact between sections and quick deployment of the antenna within seconds. The antenna consists also a special grip tape for packing when not in use. Version of AD-26/C-GN contains also a special "goose-neck" enables vertical position of the antenna irrespective of position of radio set. Antenna is available in different heights (max. 3220 mm) and with different types of thread connectors (5/8"-18UNF as standard or by request). Antenna radiator is painted MIL Green while the goose-neck is painted black.

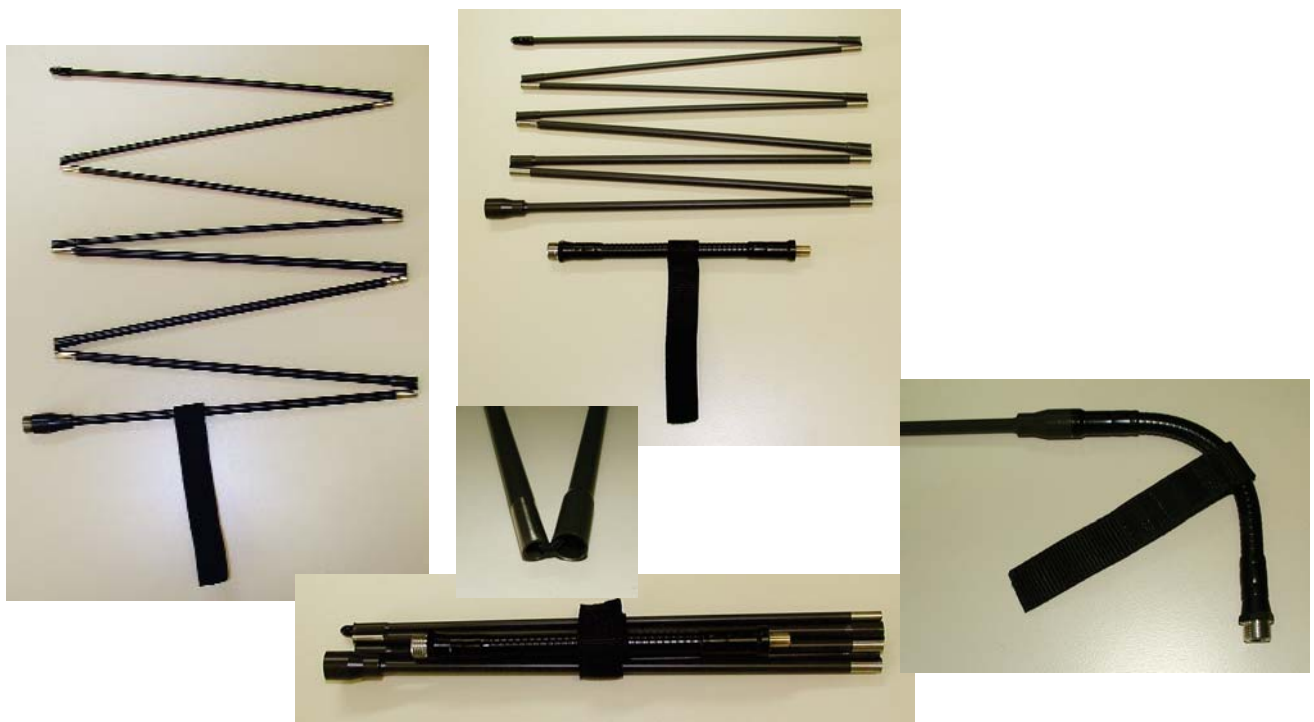

Frequency range	30 - 90 MHz
Maximum power	50 W
Polarization	VER.
Connector	thread 5/8"-18UNF (or by request; see versions below)
Height	max. 3035 mm (w/o Goose Neck), 3220 mm (with Goose Neck)
Weight	max. 0,350 kg
Max. number of sections	10
Temperature range	- 40....+70 °C

Versions:

AD-26/C-58: antenna without Goose Neck and with thread connector 5/8"-18UNF
 AD-26/C-38: antenna without Goose Neck and with thread connector 3/8"-24UNF
 AD-26/C-GN: antenna with Goose Neck and thread connector 5/8"-18UNF
 AD-26/C-GN-38: antenna with Goose Neck and thread connector 3/8"-24UNF
 AD-26/C-GN-58: antenna with Goose Neck and customized coaxial connector with thread 5/8"-18UNF
 AD-26/C-GN-78: antenna with Goose Neck and customized coaxial connector with thread 7/8"-20UNF
 AD-26/C-GN-N: antenna with Goose Neck and coaxial connector N male
 AD-26/C-GN-PL: antenna with Goose neck and coaxial connector PL-259 (UHF male)

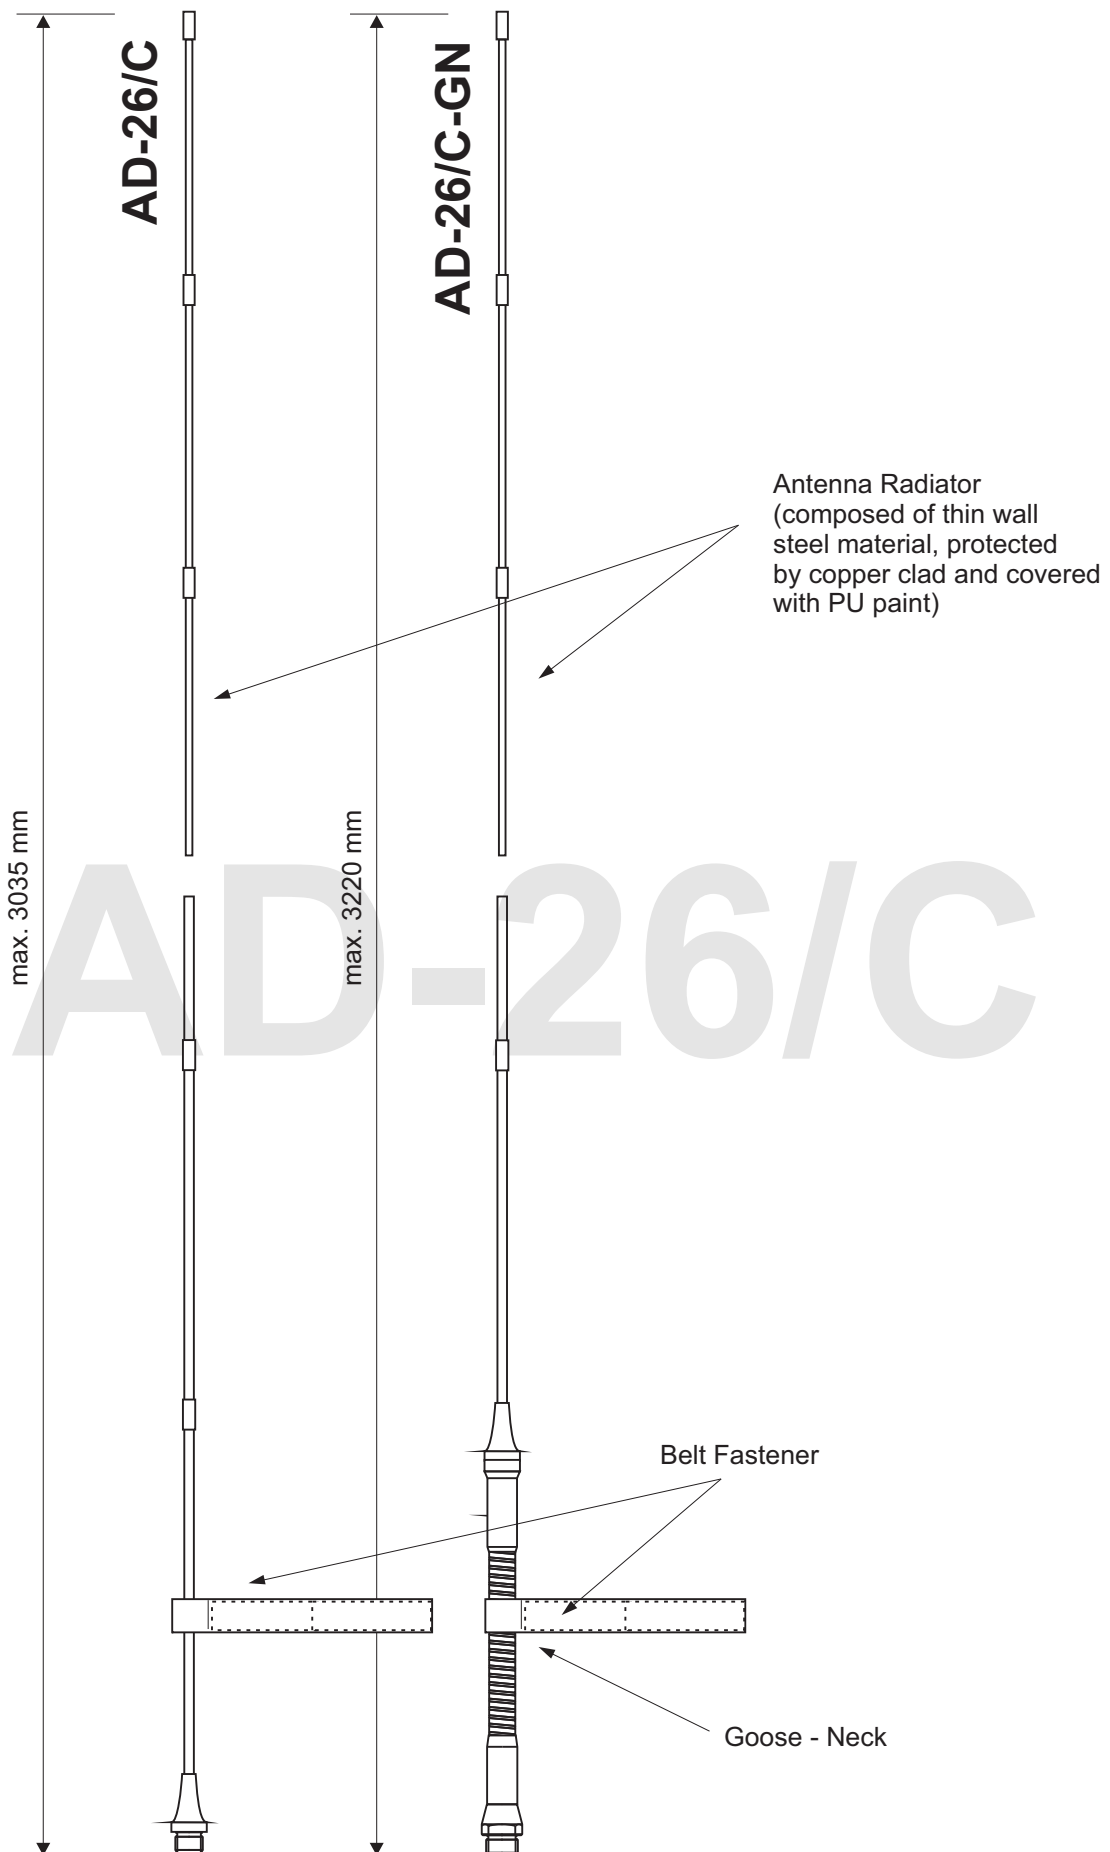

**AUTHORIZED USA
DISTRIBUTION BY:**

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned