

Telescopic mast type STV-G is a special version of the family of STV winch driven masts. The mast is modified acc. to lower top load requirements and easier mounting inside or outside the vehicle and is primarily intended for use with the Fire Brigade or similar vehicles for elevation of the lightning, photography or any other appropriate equipment.

Mast sections are made of composite material (polyester resin reinforced with fiberglass). On the end of the sections are special slide-joints made of durable polyacetal leading the sections while elevating and lowering the mast. Each section has four longitudinal guideways placed equally outside which ensure the mast could be manually rotated around its axis. Erection of the mast is enabled with hand operated winch with cogwheel transmission and with system of strong polyester belts guided between the sections. During the erection we put the belt into the winch wheel and wind it with crank arm, which lifts the sections up. For lowering the mast we simply turn the crank arm in the opposite direction without any need of hand switching which is done by built-in automatic switch mechanism. The winch has built-in automatic safety brake to protect the operator in the case of heavier loads.

Mast STV-G are made in two basic versions - with 3 or 4 sections. More sections at the same extended height enable lower retracted height. Also many other dimensions could be customized as: winch position, mast foot arrangement, top adapter diameter and height, etc...

TECHNICAL SPECIFICATIONS	STV-G/3	STV-G/4
MECHANICAL		
Extended height (m)	max. 4.0	max. 5.0
Retracted height (m)	min. 1.2	min. 1.2
No. of sections	3	4
Mast weight (kg)	< 14	< 17
Bottom section diam. (mm)	83	83
Top section diam. (mm)	61	50
Max. vertical top load (kg)	10	10
Max. wind area CxA (m ²)	0.15	0.15
Colour	black	black

ENVIRONMENTAL	
Max. oper. wind speed (km/h)	90
Operating temp. range (°C)	-45 ... +80
Humidity	MIL-STD-810, +40 °C / 93 % RH
Vibrations	MIL-STD-810, 10 – 55 Hz; Amp. +/- 0.35 mm
Shock - transit drop	MIL-STD-810F; Method 516.5 procedure IV
Salt Fog	MIL-STD-810F; Method 509.4
Sand Test	MIL-STD-810F, Method 510.4, Procedure II,
Dust Test	MIL-STD-810F, Method 510.5, Procedure I



**AUTHORIZED USA
DISTRIBUTION BY:**



Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer attuned

STV-G/3

STV-G/4

ALL DIMENSIONS IN MILLIMETERS!

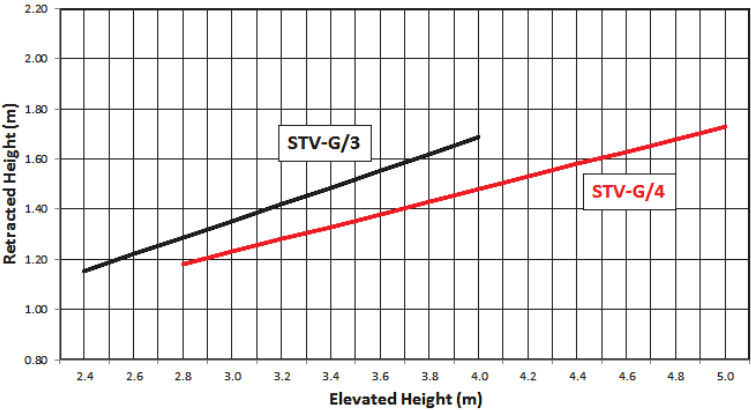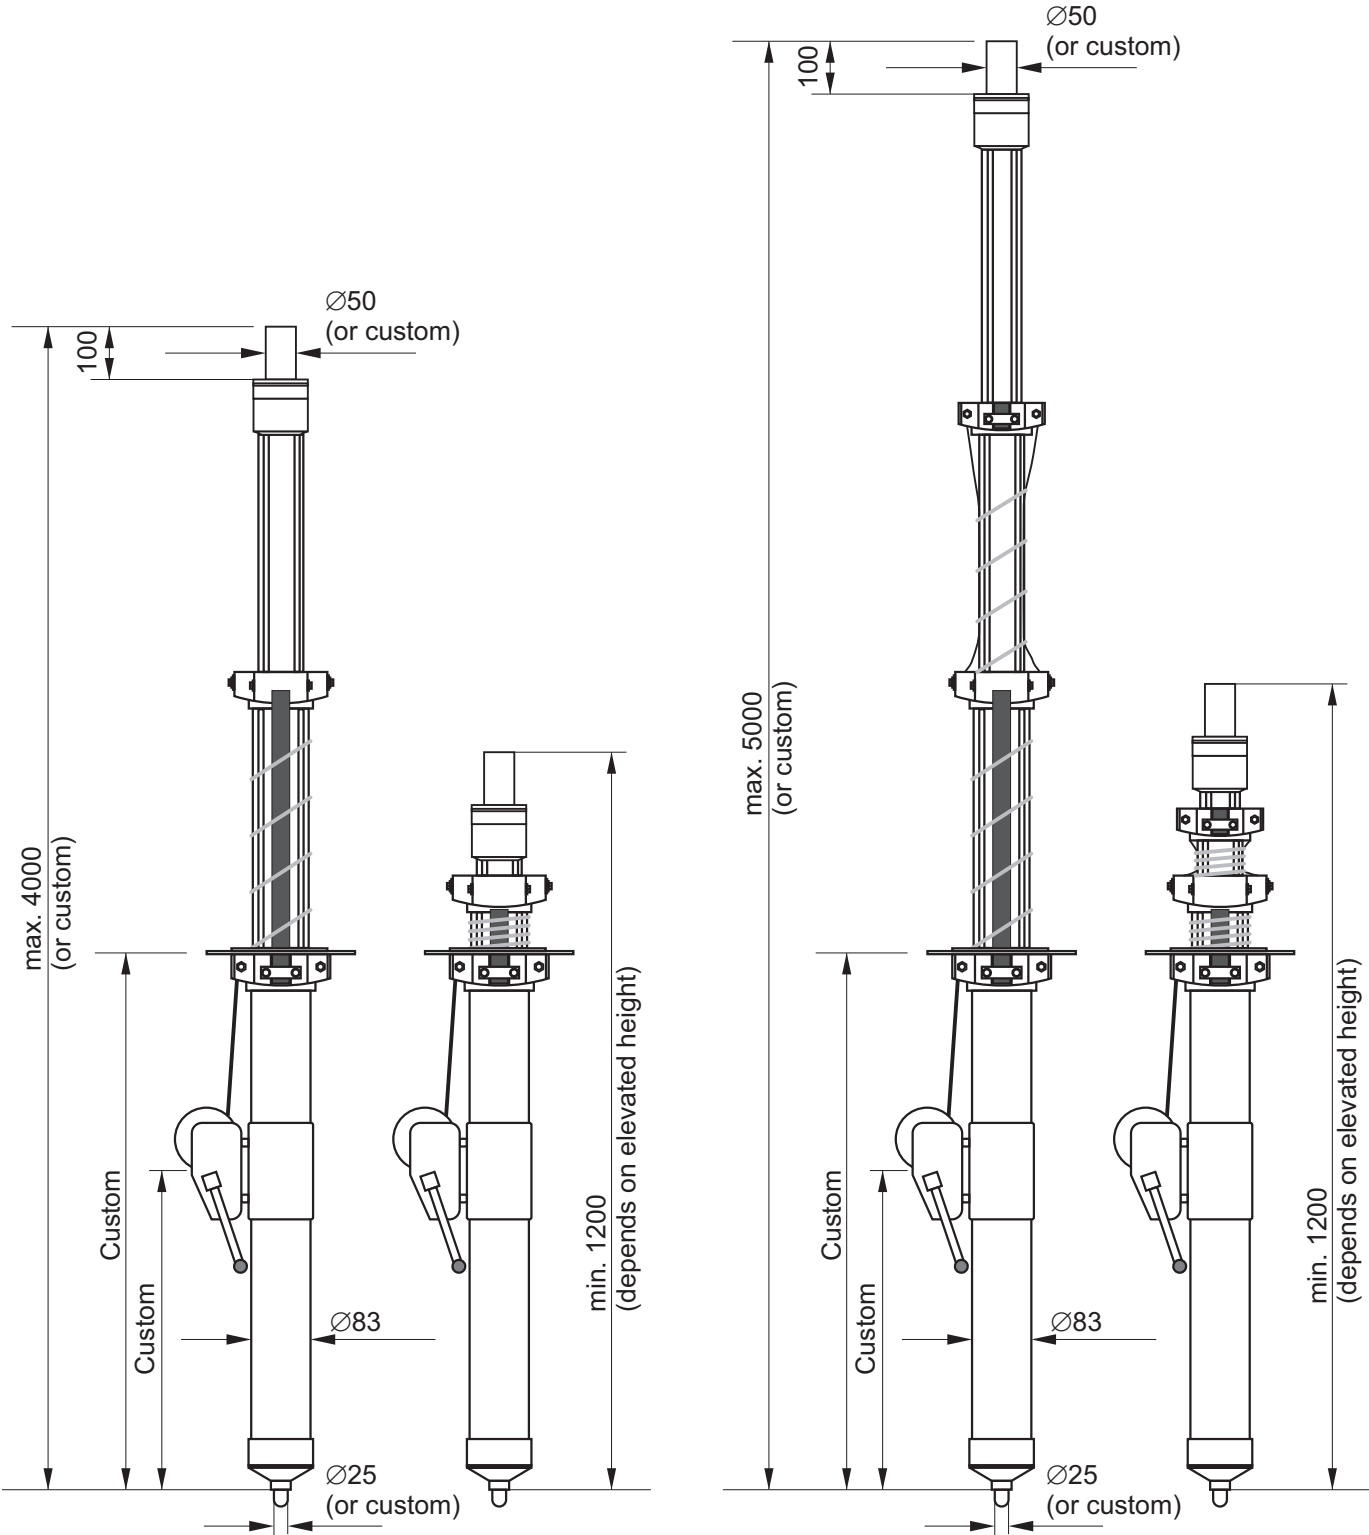

**AUTHORIZED USA
DISTRIBUTION BY:**
Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

cyntony
customer affirmed