

**VERSION: 2.2** 

# Wideband HF/VHF/UHF Vehicle Antenna

20 - 520 MHz

Product Code: OMNI-A0195

### **SPECIFICATIONS:**

Product codes:	I.N. d. I.
OMNI-A0195	N-type female
OMNI-A0195-03	4.3-10 female
Electrical:	
Frequency range	20 – 520 MHz
VSWR	< 3:5:1
Nominal input impedance	50 Ω
Feed power handling	Receive only
Connector	
OMNI-A0195	N-type female
OMNI-A0195-03	4.3-10 female
Gain:	See graph
E-plane 3 dB beamwidth	40° (± 10°)
Polarisation	Vertical
Groundplane requirement	Groundplane dependent
	(1000 mm x 1000 mm
	recommended)
Mechanical:	
Height	600 mm ± 5 mm
Diameter	Base 135 mm, radiator 35 mm
Weight	< 2 kg
Mounting base	NATO flange, 6 holes
Environmental: designed to mee	t the following specifications
Wind survival	160 km/h
Temperature (operational)	- 30 °C to + 51 °C
Temperature (storage)	- 30 °C to + 71 °C
Vibration (ground transportation)	MIL-STD-810E,
,	Method 514.5, cat 1
Vibration (operational)	MIL-STD-810E
Water ingress rating	IP 65

### PRODUCT FEATURES:

- Wide frequency coverage (20 to 520 MHz)
- Omni directional azimuth pattern
- Rugged and hard-wearing
- Suited to low-profile applications

### **APPLICATIONS:**

• Communications monitoring

### PRODUCT DESCRIPTION:

The OMNI-A0195 is a passive monitoring antenna designed to operate in the 20 to 520 MHz frequency band.


This omni directional antenna has an excellent radiation pattern, no pattern break-up, and a consistently low VSWR across the entire frequency band.



AUTHORIZED USA
DISTRIBUTION BY:

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

Cyntony
Customer attuned




## Wideband HF/VHF/UHF Vehicle Antenna

20 - 520 MHz


Product Code: OMNI-A0195 VERSION: 2.2

### **VSWR AND GAIN GRAPHS:**


### **VSWR:**

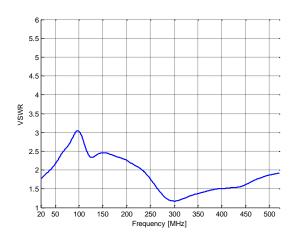

### Gain:

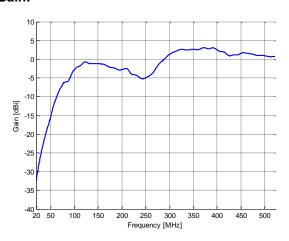

### **ELEVATION PATTERNS\*\*\***

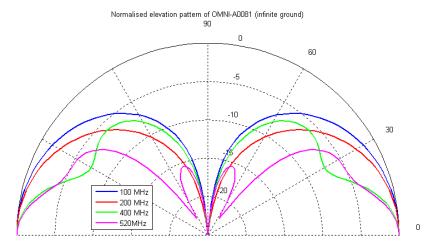

\*\*\*On infinite groundplane



AUTHORIZED USA
DISTRIBUTION BY:

Cyntony Corporation
195 Follen Road
Lexington, Massachusetts
sales@cyntony.com
781-430-0675

