

# AUTHORIZED USA DISTRIBUTION BY:

Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675



AD-18/D

The antenna AD-18/D is a wideband mobile VHF antenna for frequency range from 30 to 90 MHZ, mainly intended for use in heavy duty mobile applications.

The antenna is composed of three main parts: antenna base, lower and upper radiating element. The antenna base is made of aluminum and durable plastic materials. Inside the base is the matching circuitry and (optional) GPS antenna. Stainless steel spring absorbs the shocks and the vibrations, in addition protects the antenna against impacts. Both radiating elements are made of composite materials enable outstanding strength and roughness even in hardest conditions of use.

The antenna base has four mounting holes equally spaced on a 4.5" (114.3 mm) circle which complies with NATO standard. Different base plate dimensions are available on request.

The antenna radiator is painted with military green (RAL-6014) two-component UV resistant paint.

#### **ELECTRICAL SPECIFICATIONS - VHF:**

Frequency range 30 - 90 MHZ Impedance 50 ohm < 3,5

Gain typ. -5 ..... +0.5 dB(1/4)
Polarization vert.
Maximum power 150 W CW

Connector N female (BNC female opt.)

#### **ELECTRICAL SPECIFICATIONS - GPS:**

Frequency range L1 1575.42 +/- 10 MHz Impedance 50 ohm

VSWR < 2 Polarization RHC

LNA Gain / Voltage / Current

18 dB (+/- 2 dB) / 5 V / 19 mA
16 dB (+/- 2 dB) / 3.5 V / 13 mA
10 dB (+/- 2 dB) / 2 V / 7 mA

Noise fig. <1.5 dB SMA female

## **MECHANICAL SPECIFICATIONS:**

Design End-fed (VHF/UHF); patch antenna w. LNA (GPS)
Height 2.75 m
Weight 3.5 kg

Max. high voltage rating
Temperature range - in use
Temperature range - in stock
Temperature range - in stock
Wind rating

16 kV
-50 ... +55 °C
-55 ... +75 °C
45 m/s (160 km/h)

Color RAL-6014

### Versions:

AD-18/D: Antenna with N female input connector.

AD-18/D-G: Antenna with N female input connector and active GPS L1 antenna inside the antenna base.


AD-18/D-BNC: Antenna with BNC female input connector


AD-18/D-G-BNC: Antenna with BNC female input connector and active


GPS L1 antenna inside the antenna base.






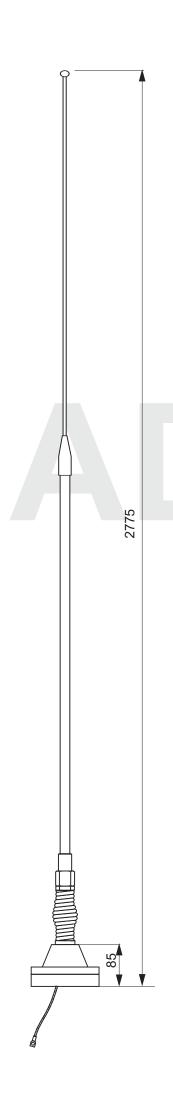

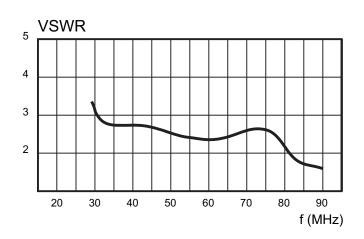

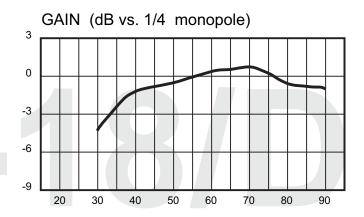

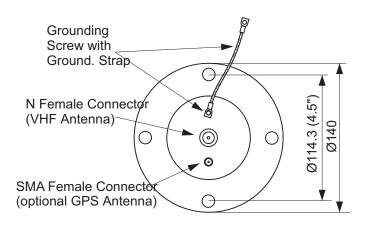

ANTENNA BASE -BOTTOM VIEW

# AUTHORIZED USA DISTRIBUTION BY:

Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675

