

VERSION: 3.4



Antenna mounted on 10 m mast

ELECTRICAL FEATURES:

- High-power handling
- Efficiency greater than 25% over 75% of the band
- Wideband without requiring ATU
- Omni-directional

MECHANICAL FEATURES:

- Rugged
- Quick erection time
- Compact packaging

HF Inverted V Dipole Antenna

1.5 – 30 MHz Product Code: DIPL-A0056

SPECIFICATIONS:

| Electrical: | |
|--|----------------------------|
| _ | 4.5.00.141 |
| Frequency range | 1.5 – 30 MHz |
| VSWR | < 2.5:1 over 90% of band |
| VOWIX | (See graph) |
| Nominal input impedance | 50 Ω |
| Efficiency | > 25% over 75% of the band |
| Connector | N-type female |
| Feed power handling | 1000 W CW |
| Polarisation | Linear |
| | |
| Mechanical: | |
| Dimensions deployed | 90 m x 10 m x 10 m |
| (l x h x w) | (Height depends on mast) |
| Dimensions on reel | 550 mm x 660 mm x 660 mm |
| Weight of antenna alone | 17 kg |
| Material | Stainless steel wire |
| | |
| Environmental: designed to meet the following specifications | |
| Wind survival | 160 km/h |
| Temperature range | -30 °C to +70 °C |
| Shock and vibration | MIL-STD-810F |

PRODUCT DESCRIPTION:

The DIPL-A0056 is a wideband inverted-V dipole antenna that operates over the 1.5 to 30 MHz band with a VSWR of less than 2.5:1 over 90% of the band.

This antenna gives a superior radiation pattern for near vertical incidence sky wave (NVIS) and short distance HF jamming and communications.


The antenna requires either a 10 m or 12 m fibreglass sectioned mast with guy ropes. This can be supplied as an optional extra.

Included with the antenna is a storage drum which allows for the quick and efficient stowage of the antenna with its feed box and distributed loads.



AUTHORIZED USA DISTRIBUTION BY: Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675






Updated 2017-04-04

HF Inverted V Dipole Antenna

1.5 – 30 MHz

Product Code: DIPL-A0056

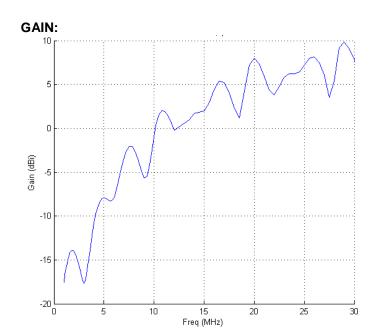


VERSION: 3.4

EFFICIENCY: 100 90 80 70 60 Efficiency (%) 50 40 30 20 10 0 L 0 5 10 15 20 25 30 Freq (MHz)



AUTHORIZED USA DISTRIBUTION BY: Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675





Updated 2017-04-04


HF Inverted V Dipole Antenna

1.5 – 30 MHz


Product Code: DIPL-A0056


RADIATION PATTERNS (over real ground):

ELEVATION PATTERNS (along the wire):

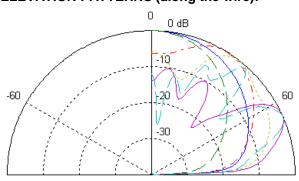

ELEVATION PATTERNS (across the wire):

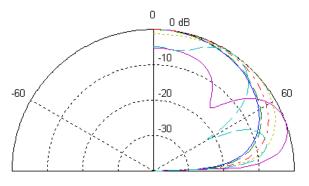

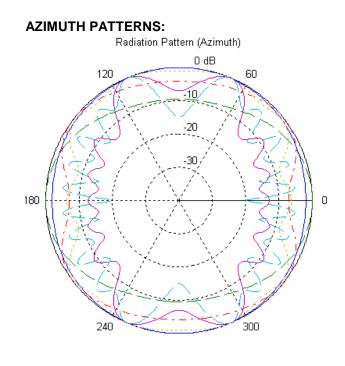

| L1: f=1.5, θ=85 |
|---------------------|
| |
| — - — L3: f=6, θ=85 |
| L4: f=10, 0=85 |
| L5: f=20, θ=85 |
| — — L6: f=30, 0=85 |
| |




Updated 2017-04-04

PAGE 3 of 3

AUTHORIZED USA DISTRIBUTION BY: Cyntony Corporation 195 Follen Road Lexington, Massachusetts sales@cyntony.com 781-430-0675





VERSION: 3.4