


# LinkAlign-360RPT-F10

AUTO ACQUISITION ANTENNA POSITIONER FOR MICROWAVE LINE OF SIGHT

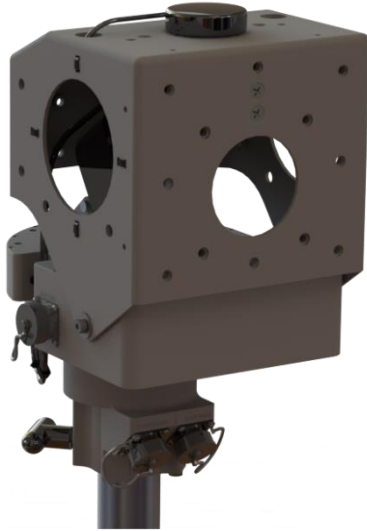

The LinkAlign-360RPT-F10 is a Power Over Ethernet (PoE) antenna positioner designed from the ground up to automatically point and peak directional antennas for microwave line of sight communications. The LinkAlign-360RPT-F10 is unique from the LinkAlign-360RPT-10 in that the base of the positioner containing the PoE input and ethernet pass thru connectors does not rotate relative to the mast, eliminating potential cable wrap challenges.

The built in GPS and digital compass with full featured web based user interface provides rapid and accurate antenna pointing. The user interface includes a stored locations database that allows easy recall of known target locations followed by a final auto peak using radio signal strength.

The LinkAlign-360RPT-F10 is typically paired with 1-2 ft antennas, payloads up to 45 lbs (20.4 kg), and offers 360° of azimuth and +/-10° of elevation range. Download the Interface Control Drawing (ICDN900855) for more details.

Optional tripods, table top mount, radio adapter brackets, antenna adapter brackets, polarization axis and transit cases are available upon request.

## TECHNICAL SPECIFICATIONS - LinkAlign-360RPT-F10

|                                   |   |
|-----------------------------------|---|
| <b>Power</b>                      |   |
| Power Over Ethernet (PoE)         | 50-57Vdc, 4 Pair PoE, Passive (Indoor Rated 50Vdc Supply Included)            |
| Standby / Maximum Power Draw      | <10W / 60W  |
| Optional DC Input                 | 20-60V  |
| <b>External Material / Finish</b> | Aluminum with stainless steel hardware / Hard coat anodize                    |
| <b>Positioner Travel</b>          |   |
| Azimuth                           | 400° (+/-200°)  |
| Elevation                         | 20° (+/-10°)  |
| <b>Positioner Drive Rate</b>      |   |
| Azimuth                           | Variable, up to 4.5°/sec max load   |
| Elevation                         | Variable, up to 2°/sec max load   |
| <b>Temperature</b>                |   |
| Operational <sup>(1)</sup>        | 3° to 140°F (-16° to 60°C)  |
| Survival                          | -40° to 158°F (-40° to 70°C)  |
| <b>Feedback Resolution</b>        | 0.1°  |
| <b>Backlash (Az/El)</b>           | less than 0.25° / less than 1°  |
| <b>Torque</b>                     |   |
| Operational (El) <sup>(2)</sup>   | 20 ft-lbs (27.1 Nm)   |
| Survival (Az/El)                  | 50 ft-lbs / 100 ft-lbs (67.8 Nm / 135.6 Nm)                                   |
| <b>Payload</b>                    | 45 lbs (20.4 kg)  |
| <b>Dimensions</b>                 | Height: 15.22" (38.7 cm), Width: 9.20" (23.4 cm), Depth: 10.63" (27.0 cm)     |
| <b>Weight</b>                     | 17 lbs (7.7 kg)   |
| <b>Mounting Interface</b>         | Clamps standard to a 2" dia mast (5 cm). Optional table top mount available   |
| <b>Antenna Mount Options</b>      | 1/4-20 thumb nuts (tool-less) and 1/4-20 threaded holes (See ICD for details) |
| <b>Communication Interface</b>    |   |
| User Interfaces                   | Web based hosted internal to unit or Nextmove proprietary command protocol    |
| Ethernet                          | 10/100 Ethernet   |
| Standard Pass Thru                | RJ45 for Ethernet   |
| Optional Serial                   | RS-232  |

<sup>(1)</sup> Minimum temperature specified at no load

<sup>(2)</sup> Maximum operating torque may be reduced at temperatures below -13°C and/or with use of peripheral devices

Specifications subject to change without notice